8 — System Module

Copyright © 2006 Nokia. All rights reserved.

(This page left intentionally blank.)

Copyright © 2006 Nokia. All rights reserved.

Table of Contents

Baseband description....8–5
System module block diagram....8–5
Baseband functional description....8–6
Absolute maximum ratings....8–6
Phone modes of operation....8–7
Operation modes....8–8
Power distribution....8–9
Clocking scheme....8–10
Bluetooth....8–10
IrDA....8–11
USB....8–11
SIM card....8–11
RF-BB interface....8–11
FBUS....8–12
ACI interface....8–12
SIM interface....8–13
MiniSD interface....8–13
Battery interface....8–14
User interface....8–15
Display interface....8–15
Keyboard....8–15
Display and keyboard backlight....8–15
ALS interface....8–15
E-Mail LED....8–16
Audio concept....8–17
Audio HW architecture....8–17
Internal microphone....8–18
Internal earpiece....8–19
Internal speaker....8–19
Vibra circuitry....8–19
Baseband technical specifications....8–20
External interfaces....8–20
USB IF electrical characteristics....8–20
FBUS interface electrical characteristics (between RAP and N2300)....8–21
SIM IF connections....8–21
MiniSD interface connections....8–22
Charger connector and charging interface connections & electrical characteristics....8–23
Battery interface electrical characteristics....8–24
Internal interfaces....8–24
I2C....8–24
Keyboard interface electrical characteristics....8–24
Display connector and interface connections....8–25
Back-up battery interface electrical characteristics....8–26
Frequency mappings....8–27
GSM850 frequencies....8–27
EGSM900 frequencies....8–28
GSM1800 frequencies....8–29
GSM1900 frequencies....8–30

Copyright © 2006 Nokia. All rights reserved.

List of Tables

Table 14 Battery interface connections....8–15
Table 15 ALS resistor values....8–16
Table 16 Charging interface connections....8–23
Table 17 Charging IF electrical characteristics....8–23
Table 18 Battery IF electrical characteristics....8–24
Table 19 Back-up battery connections....8–26
Table 20 Back-up battery electrical characteristics....8–26

List of Figures

Figure 52 System level block diagram....8–6
Figure 53 Power distribution diagram....8–9
Figure 54 BT-RAP connection....8–11
Figure 55 MiniSD contact area & pin order....8–14
Figure 56 Battery pin order....8–15
Figure 57 ALS HW implementation....8–16
Figure 58 E-mail LED implementation....8–17
Figure 59 Audio block diagram....8–18
Figure 60 Internal microphone passive circuitry....8–18
Figure 61 Internal earpiece circuitry....8–19
Figure 62 Internal speaker circuitry....8–19
Figure 63 Vibra circuitry....8–20
Figure 64 Charger connector....8–23

Copyright © 2006 Nokia. All rights reserved.

Baseband description

System module block diagram

The device is a quad-band GSM mono-block product with full QWERTY keyboard. It is based on Series 60 UI Style on the Symbian Operating System (SOS) release (version 9.1).

The device has two antennas; Internal antenna for cellular quad band GSM and BT antenna.

Bluetooth module has its own antenna. System calculations assume 15dB antenna isolation between Bluetooth and cellular GSM antenna.

Architecture overview

The device is a monoblock quadband GSM/EDGE 850/900/1800/1900 handportable phone running on Symbian series 60 release 3.0.

Product segment is a Smart phone.

The device baseband is single processor architecture based on CeMEnt G3.1S engine (CeBBo1GSM BB + Ritsa 4.5 RF).

The baseband includes following HW-blocks:

- RAP, GSM EDGE BaseBand ASIC (ARM926EJ-S MCU, Lead3 PH3 DSP)
- N2200 , primary Energy Management ASIC
- N2300, secondary Energy Management ASIC
- T-combo memory, 256Mbit NOR FLASH + 256Mbit DDR-SDRAM + 1Gbit Mux-one Nand combo memory
- Audio (Microphone, Speaker, IHF and external audio)
- EL keyboard backlightning
- Ambient light sensor
- Bottom Connectors (Mini USB-B + 2.5mm Headset Jack + Dynamo DC jack)
- SIM Interface
- BB-RF Interface
- Bluetooth BTPerf 2.3 (BT 2.0 + EDR)
- UI (Oxford QVGA LCD, QWERTY keyboard)
- IR Interface (IrDA, 115.2kbit/s)
- Mini SD Interface (hot swappable)

RF block includes:

- N7505 AHNE RF ASIC (Quad-band GSM functionality based on Ritsa 4.5 engine.)
- N7520 front end module (PA and antenna switch)
- G7500 VCO and G7501 VCXO (38.4MHz)

Copyright © 2006 Nokia. All rights reserved.

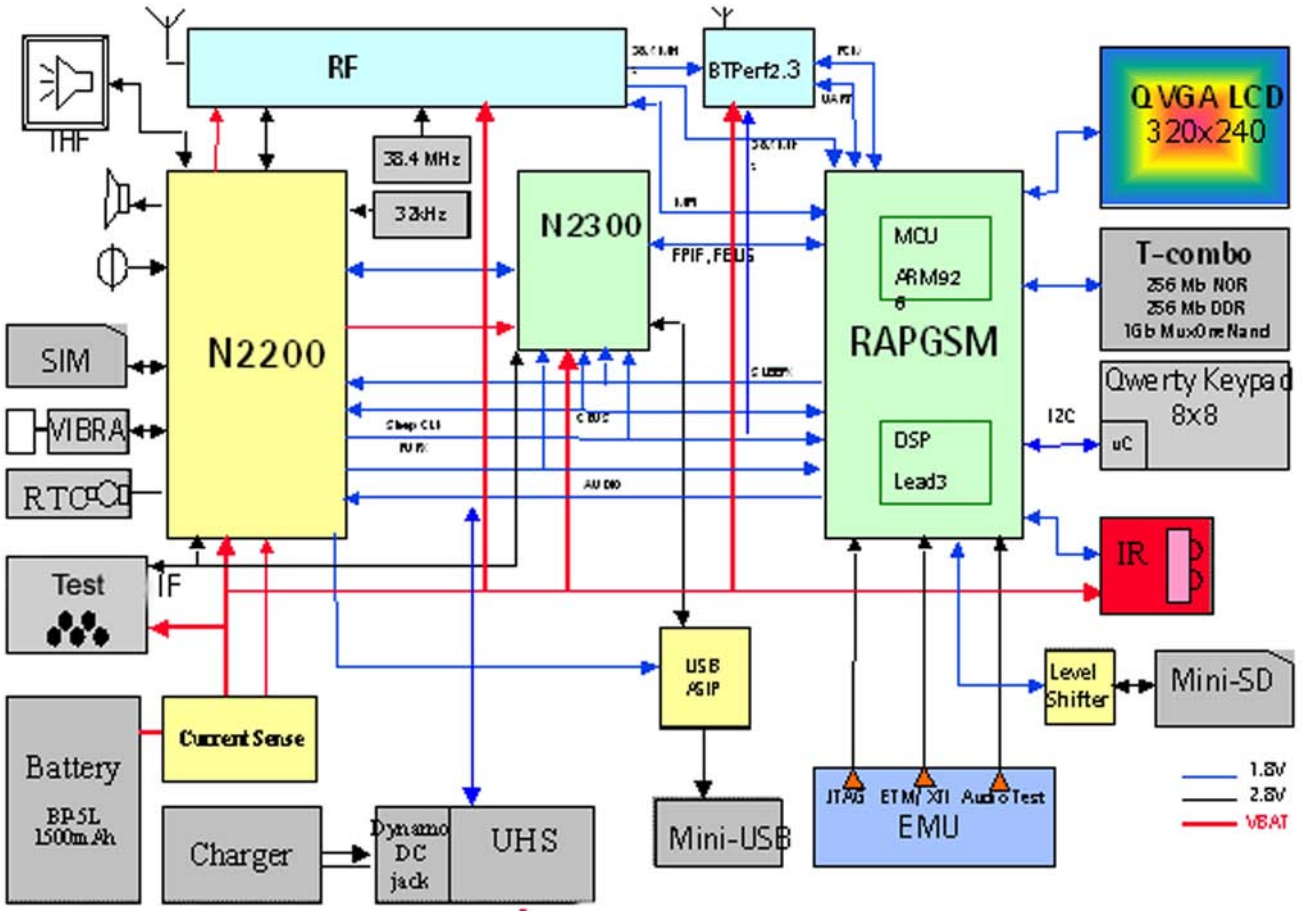

Figure 52 System level block diagram

Baseband functional description

Digital baseband is single processor architecture. It consists of RAP, EM ASIC (N2200), EM ASIC (N2300) and memories as the core. RAP is a GSM EDGE chip with lots of peripheral features. Supported cellular protocols in RAP are GSM (minimum EDGE class 10, GPRS phase2). In general RAP consists of three separate parts. The first part is processor subsystem (PSS) that includes both MCU and DSP processors and related functions. The second part is MCU peripherals that are peripherals mainly controlled by MCU. The third one is DSP peripherals that are peripherals mainly controlled by DSP. N2200 is an audio ASIC including also energy management (EM) functions. With second EM ASIC N2300, it covers the analog audio and energy management function. N2200 is also the device that handles the power-up and power-down routines of the system. During the times when the digital BB is alive N2200 handles a variety of tasks that can not be accomplished elsewhere due to voltage requirements, noise etc. N2300 power IC is intended for energy management control, supply voltage generation and charge control of mobile phone. N2300 has a step down type (buck) programmable switch mode regulator for digital core supply generation, up (boost) switch mode regulator with current control for led supply, charge control circuitry with integrated switch, level shifters and regulator for FBUS/ USB-OTG, and digital circuitry including registers. Stacked triple combo memory (RAM, Nor, Nand in one package) includes 256Mbit DDR SDRAM , 256Mbit NOR Flash and 1Gbit Mux-One Nand.

Absolute maximum ratings

Signal	Min	Nom	Max	Unit	Notes
Battery voltage (idle)	-0.3		5.2	V	Battery voltage maximum value is specified during charging is active

Copyright © 2006 Nokia. All rights reserved.

Signal	Min	Nom	Max	Unit	Notes
Battery voltage (Call)	+3.2		+4.8	V	Battery voltage maximum value is specified during charging is active
Charger input voltage	-0.3		+16	V	

Phone modes of operation

Mode	Description
NO_SUPPLY	(dead) mode means that the main battery is not present or its voltage is too low (below N2200 master reset threshold) and that the back-up battery voltage is too low.
BACK_UP	The main battery is not present or its voltage is too low but back-up battery voltage is adequate and the 32 kHz oscillator is running (RTC is on).
PWR_OFF	In this mode (warm), the main battery is present and its voltage is over N2200 master reset threshold. All regulators are disabled, PurX is on low state, the RTC is on and the oscillator is on. PWR_OFF (cold) mode is almost the same as PWR_OFF (warm), but the RTC and the oscillator are off.
RESET	RESET mode is a synonym for start-up sequence. In this mode certain regulators are enabled and after they and RFClk have stabilized, the system reset (PurX) is released and PWR_ON mode entered. RESET mode uses 32 kHz clock to count the REST mode delay (typically 16 ms).
DEEP SLEEP	Deep sleep mode is entered only from Pwr_on mode with the aid of sw when the system's activity is low. At deep sleep, VCTCXO is powering off. System is running with the sleep clock. Regulators are in sleep mode.
FLASHING	FLASHING mode is for SW downloading.

Voltage limits

Parameter	Description	Value
VMSTR	Master reset threshold (N2200)	2.2V (typ.)
VMSTR+	Master reset threshold level, rising (N2300)	2.1V (typ.)
VMSTR-	Master reset threshold level, falling (N2300)	1.9V (typ.)
VCOFF+	Hardware cutoff (rising)	2.9V (typ.)

Copyright © 2006 Nokia. All rights reserved.

Parameter	Description	Value
VCOFF-	Hardware cutoff (falling)	2.6V (typ.)
SWCOFF	SW cutoff limit	~3.2V

The master reset threshold controls the internal reset of N2200 / (N2300). If battery voltage is above VMSTR, N2300's charging control logic is alive. Also, RTC is active and supplied from the main battery. Above VMSTR, N2300 allows the system to be powered on although this may not succeed due to voltage drops during start up. SW can also consider battery voltage too low for operation and power down the system.

Power key

The system boots up when power key is pressed (adequate battery voltage, VBAT, present).

Power down can be initiated by pressing the power key again (the system is powered down with the aid of SW).

Operation modes

There are four different power up possibilities to switch power on:

- Power key is pressed
- Charger is connected
- A pulse is supplied to MBUS line (Clk)
- Internal power up with Real Time Clock alarm.

  Power is not switched on by supplying battery voltage as in DCT4 generations

It should be noted that system behavior depends on the type of device the engine is in. The difference is mainly in the power key concept, basically:

- The power key controls the system power ON/OFF
- The system boots up always when not empty battery is connected. The power key controls only the CMT functionality. PDA functions are always available
- To the EM ASIC's functionality there is no difference how the power key is connected (the power up and down signaling and timings are the same)

Copyright © 2006 Nokia. All rights reserved.

Power distribution

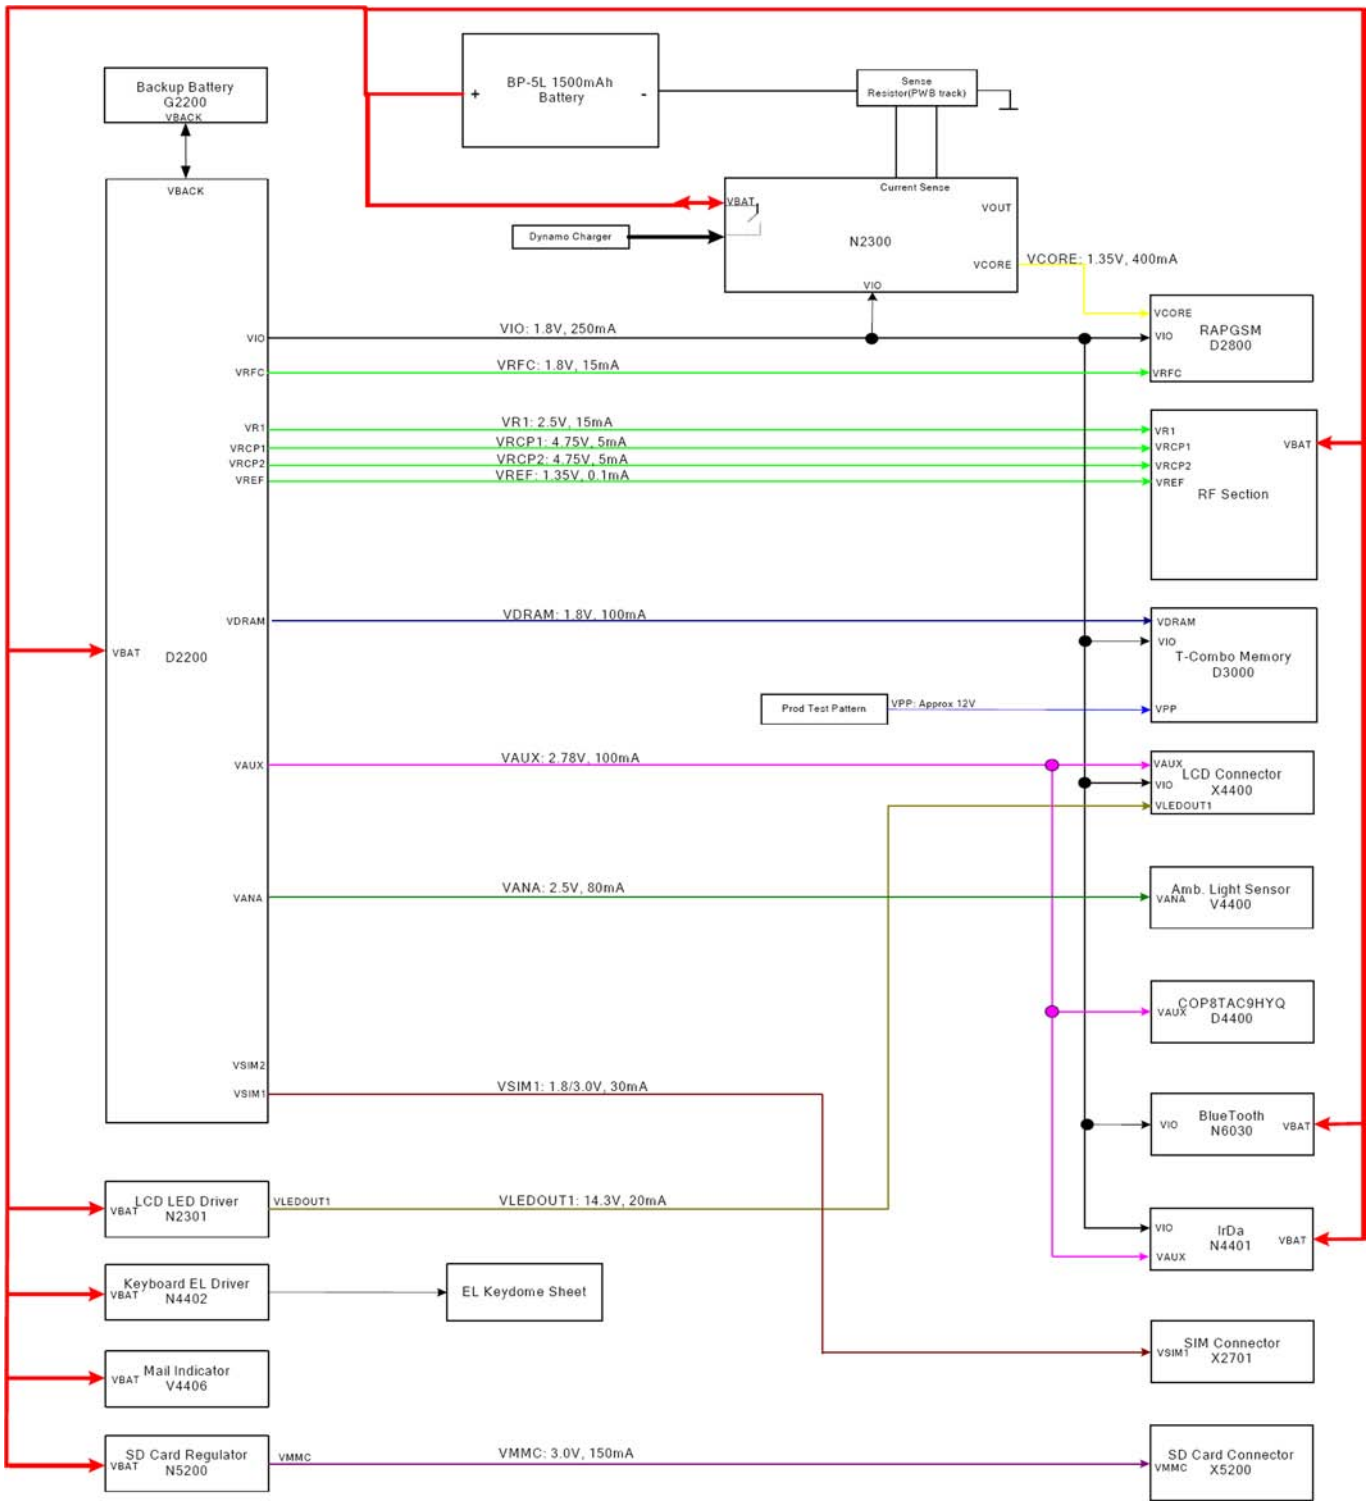

Figure 53 Power distribution diagram

System power-up

Power up procedure starts when the user presses power key (option 1) or when (not empty) battery is attached (option 2). In addition, some other triggers may start the system.

Copyright © 2006 Nokia. All rights reserved.

Power down procedure

Controlled powering off is done with the aid of SW when the user requests it or when the battery voltage is falling too low. Uncontrolled powering off happens for example when battery is suddenly removed.

Clocking scheme

The main system clock is a small signal sine wave created in the RF-section of the engine with Voltage Controlled, Temperature Compensated, crystal oscillator (VCTCXO). The delivered frequency is 38.4MHz . RAP has its own sleep mode in which use low accuracy, low frequency sleep clock instead of RF clock. In deep sleep, ASIC is sleep mode and therefore VCTCXO can be switched off (VCTCXO is a significant power consumer). In deep sleep also the core voltage is decreased.

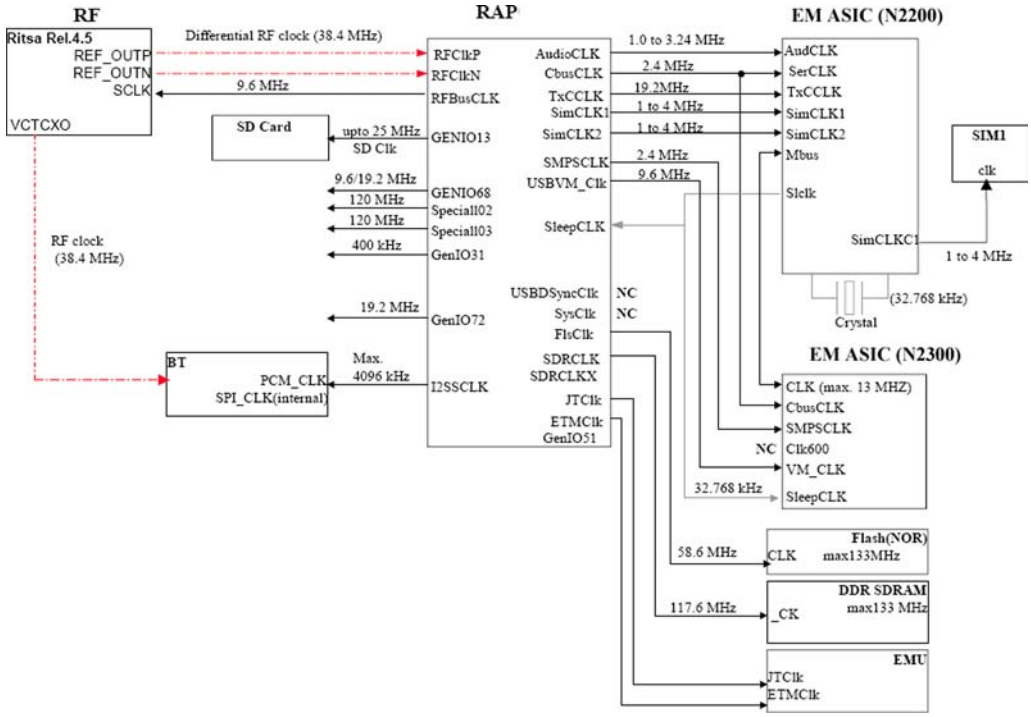

Bluetooth

The device uses BTH Perf2.3 solution. The Bluetooth is V 2.0 + EDR. The Bluetooth module is implemented by using CSR's BC4-ROM. BlueCore-4 ROM is a single chip radio and baseband IC for Bluetooth 2.4 GHz systems.

In BB5.0 ,BT interface has been designed so that it allows attaching BT modules from different vendors. The interface consists of UART interface and PCM interface for audio.

Copyright © 2006 Nokia. All rights reserved.

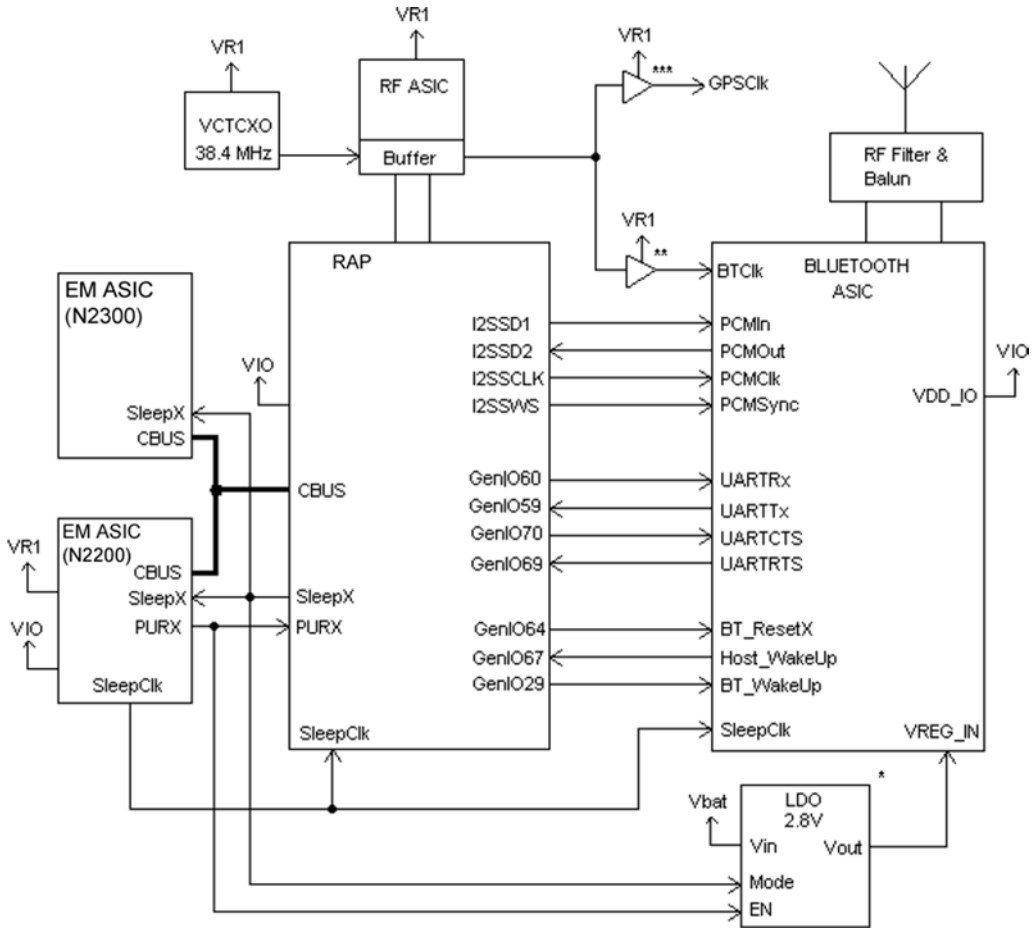

Figure 54 BT-RAP connection

IrDA

IrDA specifies a reliable, fully digital peer-to-peer data link between IrDA units at data rates from 9600 bits/s to 115 kbit/s. The link is based on the serial transmission of data as pulses of infra red light at the wave length of 870nm and angles of +-15degrees at the range 0 - 50 to 100 cm. The transmission is not omnidirectional but focused and only reaches a peer at a limited line-of-sight distance from the transmitter thus not disturbing any other units in the neighbourhood.

IR communication is half-duplex e.g. the IR receiver sees its own transmission, and the IR interface is either transmitting or receiving, but not both at once.

USB

USB (Universal Serial Bus) provides a wired connectivity between a USB host PC and peripheral devices.

USB is a differential serial bus for USB devices. USB controller supports USB specification revision 2.0 with full speed USB (12 Mbps). The device is connected to the USB host through the system connector. The USB bus is hot plugged capable, which means that USB devices may be plugged in/out at any time.

SIM card

The device SIM interface supports both1.8V and 3V technology smart cards.

The power is not allowed to be supplied to cards until the power contacts to battery are properly connected.

RF-BB interface

In BB-RF interface there are 19 signal pins between RAP and cellular RF.

Copyright © 2006 Nokia. All rights reserved.

Between EM (N2200) and cellular RF there are 8 pins + VBAT. RF is controlled directly by RAP and N2200. Digital control signals, such as RFBus and reset signals, are taken from RAP and analog control signals, such as AFC and TxC, are taken from EM ASIC (N2200).

RFBUS is similar control bus than CBUS and DBUS, but it is only used as controlling interface between RF and BaseBand (RAP). RAP controls AFC and TxC signals via TxCData bus and RF regulator control is done via CBUS.

Analog Rx and Tx signals are connected to/from RAP that includes RF converters for this purpose. The TxC serial bus interface is a one-way bus, which is used to transfer data from RAP3G to the N2200 ASIC TXC DACs.

These DACs are used to control the RF power amplifiers. The TXC bus includes TxCCtrl pin, which is used to select the EM ASIC (N2200) DAC, the data is written to. In case the TxCCtrl is in low state, the data is written to the DAC1 and in case the TxCCtrl is in high state, the data is written to DAC2.

The TxC bus clock frequency is programmable but the frequency to be used in CeBBo1 is 19.2 MHz and for RFBUS the frequency used is 9.6 MHz.

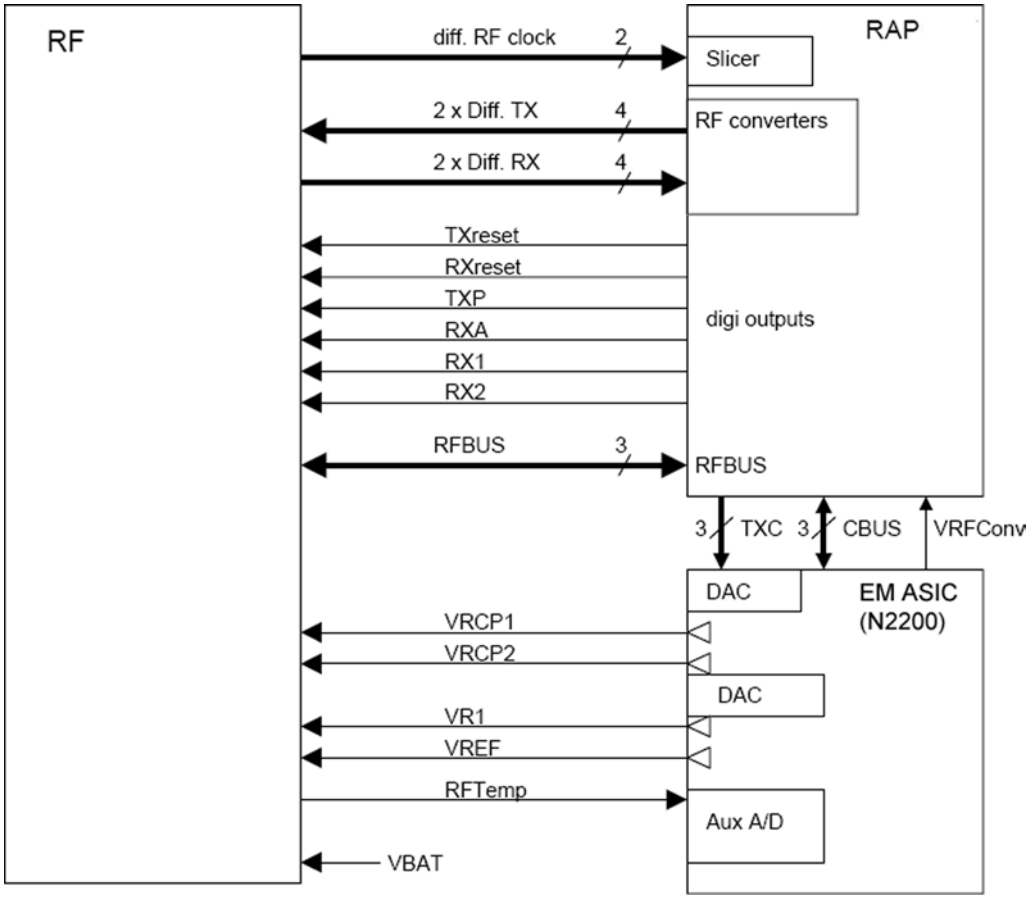

FBUS

USB and FBUS have multiplexed interface between EM ASIC (2300) and RAP.

ACI interface

The ACI (Accessory Control Interface) is a point-to-point, bi-directional, single line serial bus.

It has two main features: the insertion and removal detection of an accessory device and acting as a data bus between phone and accessory, intended for control purposes. A third function of ACI is to identify and authenticate the accessory.

Copyright © 2006 Nokia. All rights reserved.

SIM interface

The device has one SIM (Subscriber Identification Module) interface. It is only accessible if battery is removed. The SIM interface consists of an internal interface between RAP and EM ASIC (N2200), and of an external interface between N2200 and SIM contacts.

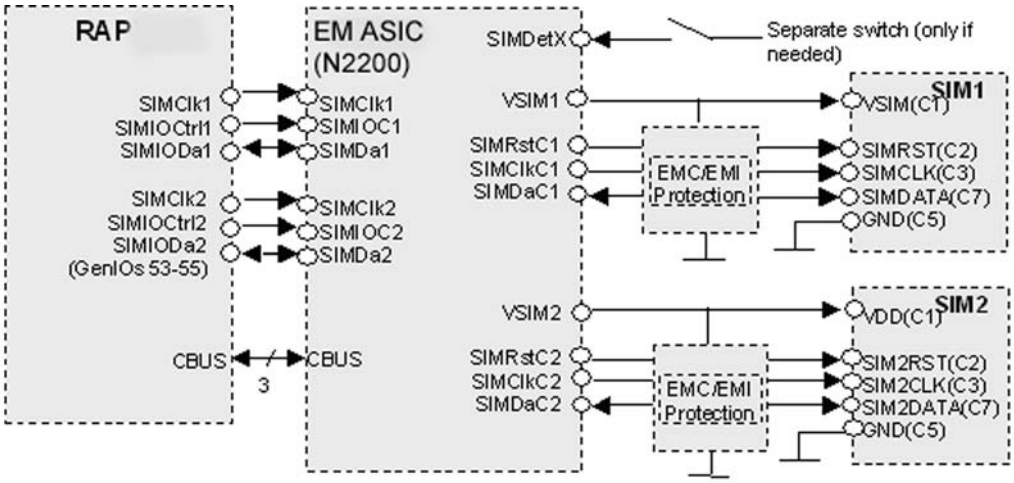

The EM ASIC SIM1 interface supports both 1.8 V and 3.0 V SIM cards. The SIM interface voltage is first 1.8 V when the SIM card is inserted, and if the card does not response to the ATR a 3 V interface voltage is used.

MiniSD interface

In the RAP the MMC/SD interface is multiplexed with NAND Flash and SIM2 interfaces.

Copyright © 2006 Nokia. All rights reserved.

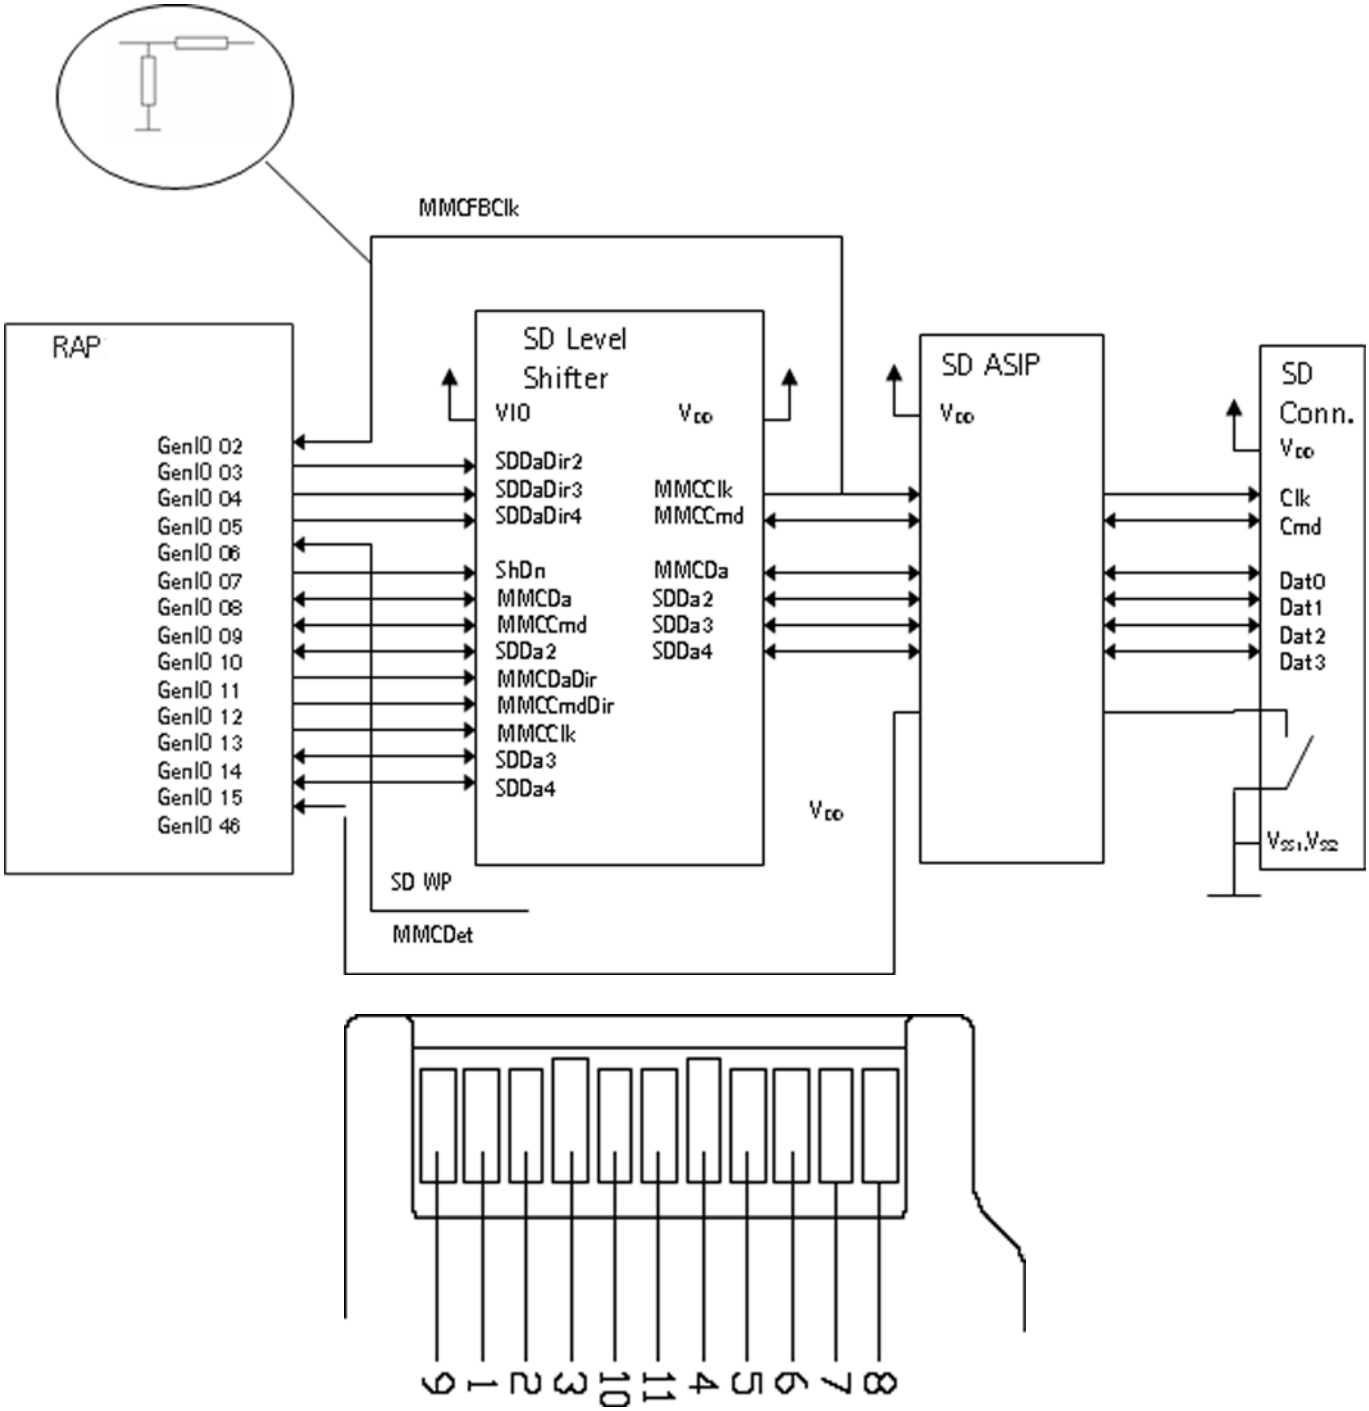

Figure 55 MiniSD contact area & pin order

Battery interface

The battery interface supports a 3-pole battery interface. The interface consists of three connectors: VBAT, BSI and GND.

The BSI line is used to recognize the battery capacity by a battery internal pull down resistor.

Copyright © 2006 Nokia. All rights reserved.

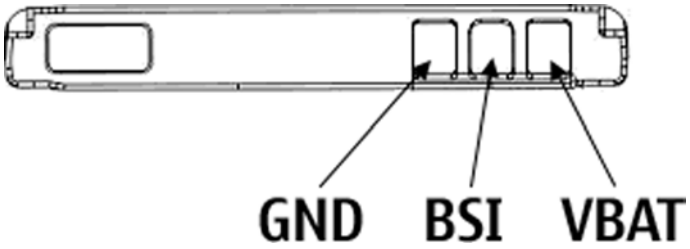

Figure 56 Battery pin order

Table 14 Battery interface connections

Pin	Signal	I/O	Engine connection		Notes
1	VBAT	->	EM ASIC N2200	VBAT	Battery voltage
2	BSI	->	EM ASIC N2200	BSI	Battery size indication (fixed resistor inside the battery pack)
3	GND		GND		Ground

Battery temperature is estimated by measuring separate battery temperature NTC via the BTEMP line, which is located on the transceiver PWB.

For service purposes, the device SW can be forced into local mode by using pull down resistors connected to the BSI line.

User interface

Display interface

The device supports Oxford QVGA 2.8" TFT display with 320 x 240 resolution and 24bit colors. It uses 8-bit display interface.

Keyboard

The device uses external COP8 micro controller to handle engine & qwerty keyboard matrix. The communication between COP8 and RAP is handled by I2C bus.

Display and keyboard backlight

The device has one LED Driver (SMPS) that is used to drive six display LEDs.

Display LEDs are connected in to two three LED series. Current adjustment of the driver is done from the display LED branch, and keyboard current also depends on the display brightness. In a typical use case, keyboard LEDs are turned ON only in dark ambient lighting conditions.

The keyboard backlight is made with electroluminance. The device has discrete EL-driver, which provide backlight for keyboard.

ALS interface

Ambient Light Sensor (ALS) is located in the upper part of the phone. It consists of the following components:

- lightguide (part of the front cover)
- phototransistor (V4400) + resistor (R4401)
- NTC + resistors (R4400, R4402, R4403)

Copyright © 2006 Nokia. All rights reserved.

- EM ASIC (N2200)

Information on ambient lighting is used to control the backlights of the phone:

- Keypad lighting is switched on only when the environment is dark / dim
- Display backlights are dimmed, when the environment is dark / dim

The ambient light sensor itself is a photo transistor, which is temperature-compensated by an external NTC resistor. N2200 reads the light sensor (LS) and temperature (LST) results.

ALS calibration is not possible in the service points. ALS is serviced by replacing faulty phototransistors.

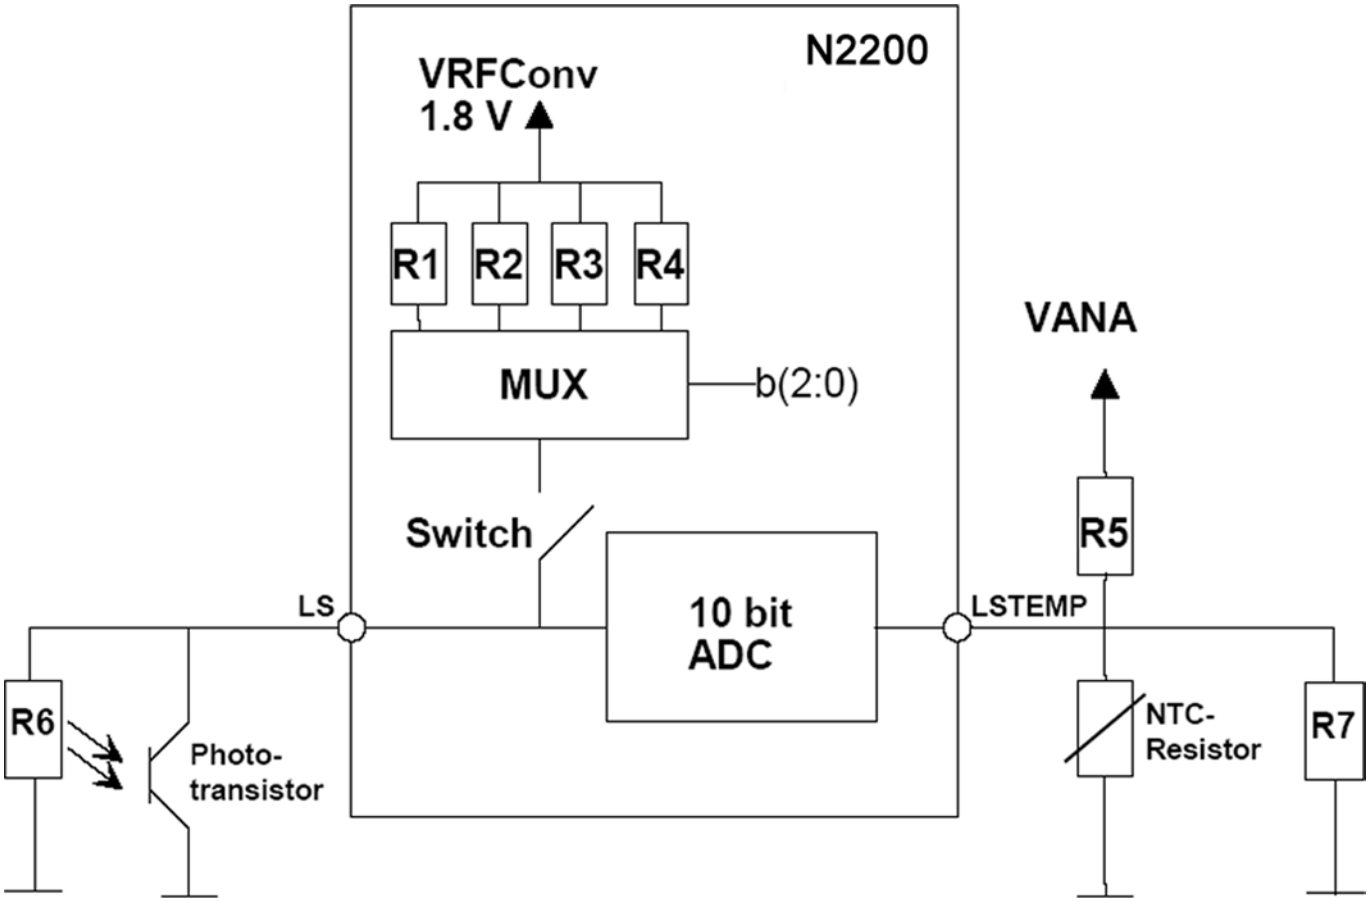

Figure 57 ALS HW implementation

Table 15 ALS resistor values

Symbol	R1	R2	R3	R4	R5	R6	R7	NTC-res
Value	5 kOhm	15 kOhm	30 kOhm	50 kOhm	470 kOhm	100 kohm	470 kohm	47 kOhm

E-Mail LED

The device has E-Mail indicator LED.

Copyright © 2006 Nokia. All rights reserved.

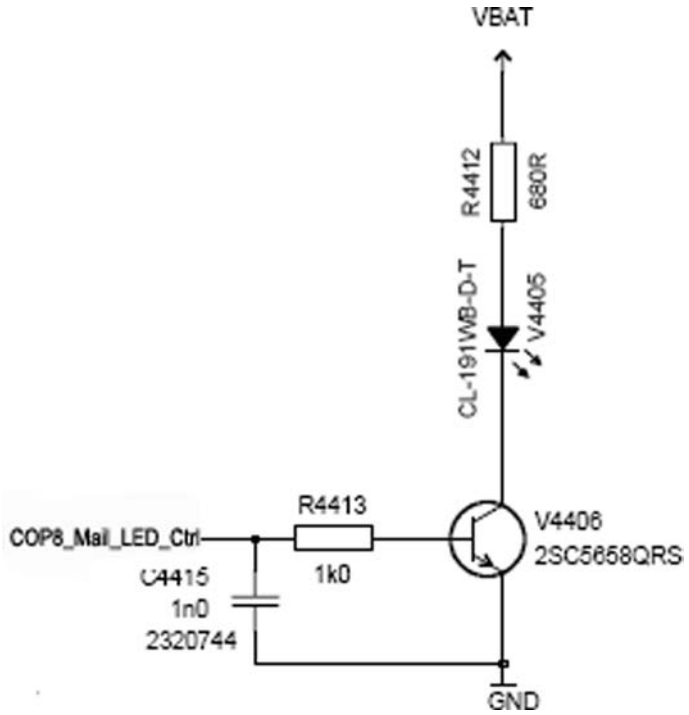

Figure 58 E-mail LED implementation

Audio concept

Audio HW architecture

In BB5.0, the digital functions of audio are integrated into RAP and analogue functions into EM ASIC N2200.

Audio codec supports 48 kHz and 44.1 kHz sampling rates in addition to 40 kHz, which provides full 20 kHz audio bandwidth (near CD quality) in Rx path.

Copyright © 2006 Nokia. All rights reserved.

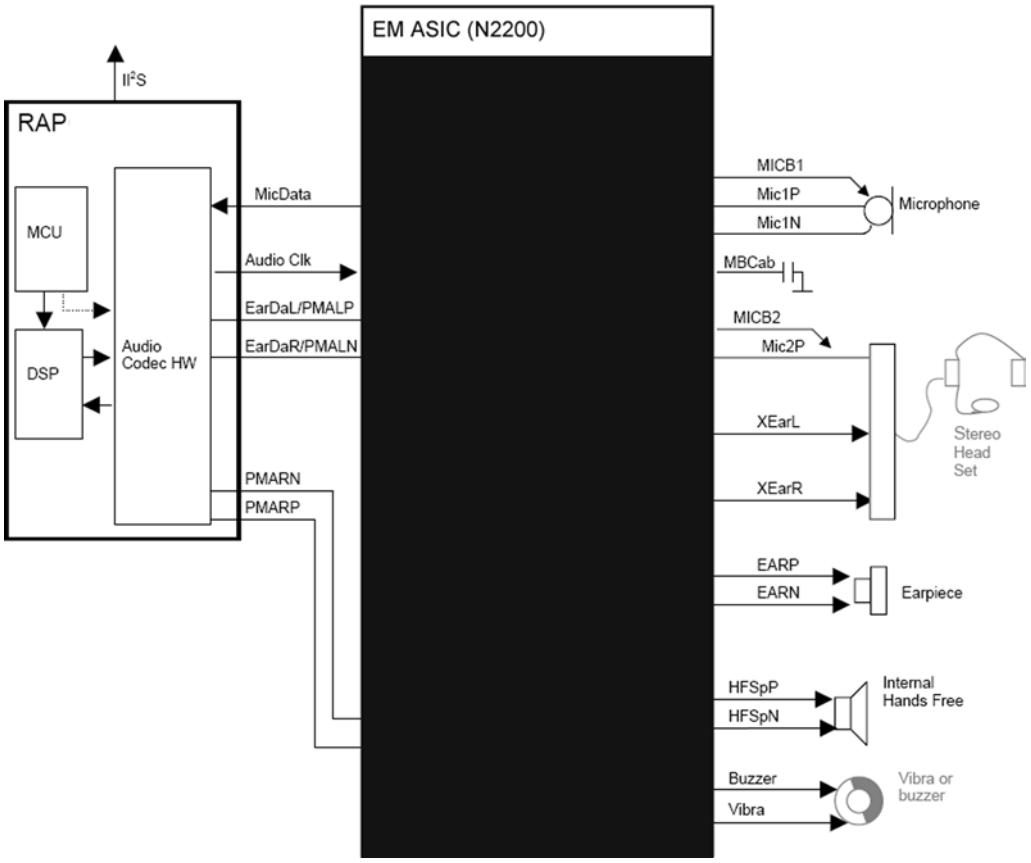

Figure 59 Audio block diagram

Internal microphone

Internal microphone is used for HandPortable (HP) and Internal HandsFree (IHF) call modes.

An analogue electret microphone is connected to Retu ASIC's Mic1P and Mic1N is connected ground near Retu.

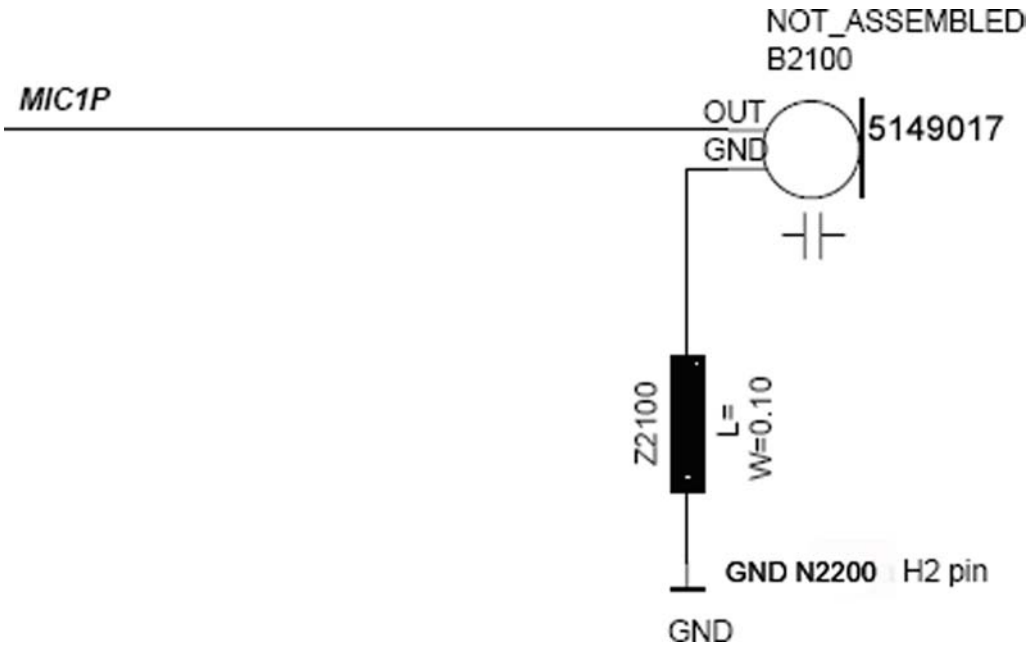

Figure 60 Internal microphone passive circuitry

Copyright © 2006 Nokia. All rights reserved.

Internal earpiece

The internal earpiece is used in the HandPortable (HP) call mode. A dynamic 7x11 mm earpiece capsule is connected to N2200 ASIC's differential outputs EarP and EarN.

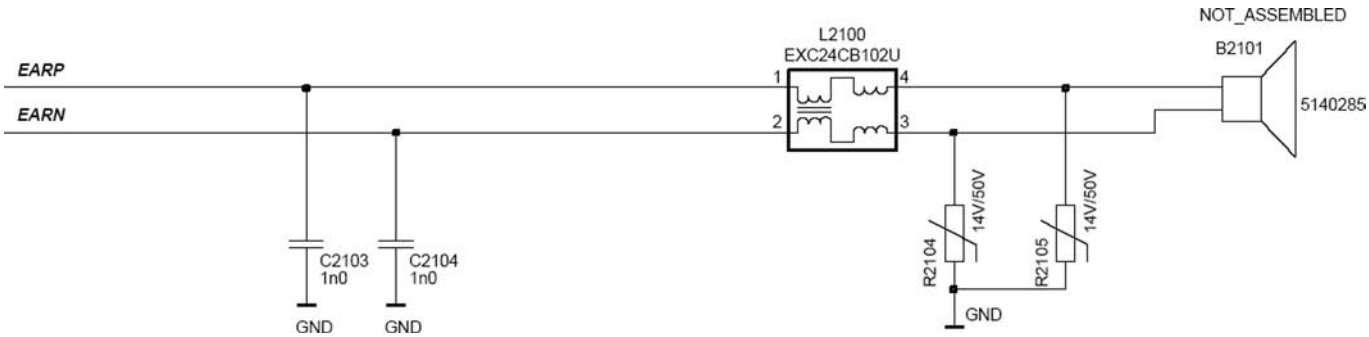

Figure 61 Internal earpiece circuitry

Internal speaker

The internal speaker is used in Internal HandsFree (IHF) call mode.

A dynamic 20 mm speaker is connected to N2200 ASIC's outputs HFSpP and HFSpN.

The IHF amplifier integrated in EM ASIC N2200 is a Digital Pulse Modulated Amplifier (DPMA).

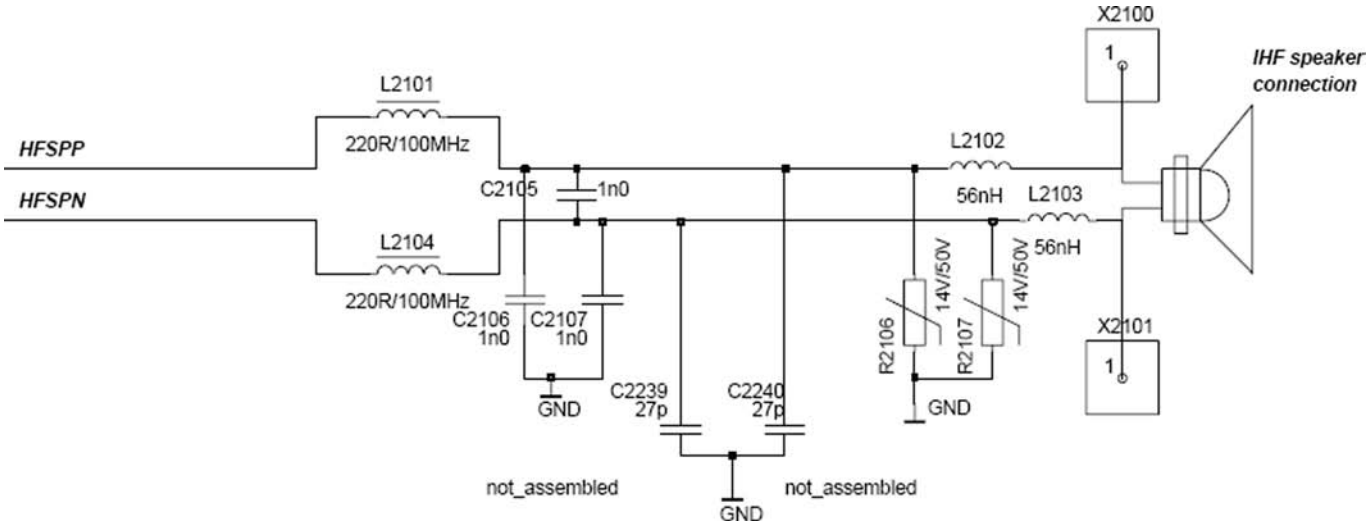

Figure 62 Internal speaker circuitry

Vibra circuitry

Vibra is used for vibra-alarm function.

The vibra motor is connected to the N2200 ASIC VibraP and VibraN Pulse Width Modulated (PWM) outputs.

Copyright © 2006 Nokia. All rights reserved.

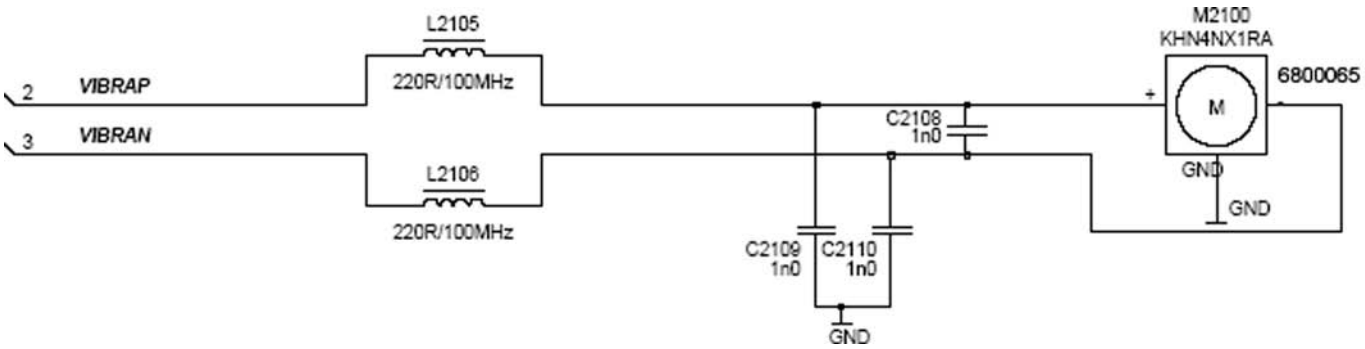

Figure 63 Vibra circuitry

Baseband technical specifications

External interfaces

Name of Connection	Connector reference
USB	X2001
Charger	X2000
Headset	X2002
SIM	X2700
MiniSD	X5200
Battery connector	X2070

USB IF electrical characteristics

Description	Parameter	Min	Max	Unit	Notes
Absolute maximum voltage on D+ and D-	$V_{D+/D-}$	-1	4.6	V	USB specification revision 2.0
Supply voltage	VBUS	4.4	5.25	V	
Supply current:					
Functioning	I_{VBUS}		100	mA	
Suspended	I_{VBUS}		500	uA	
Unconfigured	I_{VBUS}		100	mA	
High-level input voltage:				V	
High (driven)	V_{IH}	2			
High (floating)	V_{IHZ}	2.7	3.6		
Low-level input voltage	V_{IL}		0.8	V	

Copyright © 2006 Nokia. All rights reserved.

Description	Parameter	Min	Max	Unit	Notes
Differential input sensitivity	V_{DI}	0.2		V	|(D+) - (D-)|
Differential input voltage range	V_{CM}	0.8	2.5	V	Included VDI range
Low-level output voltage	V_{OL}	0	0.3	V	
High-level output voltage (driven)	V_{OH}	2.8	3.6	V	
Output signal crossover voltage	V_{CRS}	1.3	2	V	

FBUS interface electrical characteristics (between RAP and N2300)

Description	Parameter	Min	Max	Unit
High-level input voltage	V_{IH}	0.7 x V_{DDSHV2}	V_{DDSHV2}	V
Low-level Input voltage	V_{IL}	0	0.3 x V_{DDSHV2}	V
High-level output voltage	V_{OH}	0.8 x V_{DDSHV2}	V_{DDSHV2}	V
Low-level output voltage	V_{OL}	0	0.22 x V_{DDSHV2}	V
Rise/fall time	tR/tF	0	25	ns
(VDDSHV2 = 1.8V)				

SIM IF connections

Pin	Signal	I/O	Engine connection		Notes
C1	VSIM	Out	N2200	VSIM1	Supply voltage to SIM card, 1.8 V or 3.0 V.
C2	SIMRST	Out	N2200	SIM1Rst	Reset signal to SIM card
C3	SIMCLK	Out	N2200	SIM1ClkC	Clock signal to SIM card
C5	GND	-	GND		Ground
C7	SIMDATA	In/Out	N2200	SIM1DaC	Data input / output

Copyright © 2006 Nokia. All rights reserved.

MiniSD interface connections

Signal name/ RAP3G	Signal name/ SD Card	Signal Properties Direction -- Levels -- Freq./Timing Resolution			Description / Notes
GenIO 09 or GenIO 54	MMCCmd	<>	0-1.8 V / 0-3.6V		SD Command
GenIO 13 or GenIO 53	MMCClk	>	0-1.8 V / 0-3.6V	Max 25 MHz	SD Clock
GenIO 08 or GenIO 55	MMCDa	<>	0-1.8 V / 0-3.6V		SD Data bit 0
GenIO 07	MMCLSShutDn	>	0-1.8 V / 0-3.6V		Level shifter shutdown
GenIO 10	SDDa2	< >	0-1.8 V / 0-3.6V		Data bit 1
GenIO 14	SDDa3	< >	0-1.8 V / 0-3.6V		Data bit 2
GenIO 15	SDDa4	< >	0-1.8 V / 0-3.6V		Data bit 3
GenIO 12 or GenIO 65	MMCCmd Dir	>	0-1.8 V / 0-3.6V		Command Dir
GenIO 11 or GenIO 66	MMCDaDir	>	0-1.8 V / 0-3.6V		Data bit 0 Dir
GenIO 03	SDDaDir2	>	0-1.8 V / 0-3.6V		Data bit 1 Dir
GenIO 04	SDDaDir3	>	0-1.8 V / 0-3.6V		Data bit 2 Dir
GenIO 05	SDDaDir4	>	0-1.8 V / 0-3.6V		Data bit 3 Dir
GenIO 46	MMCDet	<	0-1.8 V / 0-3.6V		Card insert/ removal detection

Copyright © 2006 Nokia. All rights reserved.

Signal name/ RAP3G	Signal name/ SD Card	Signal Properties Direction -- Levels -- Freq./Timing Resolution			Description / Notes
GenIO 06	SD Write Protect	<	0-1.8 V / 0-3.6V		Write protect detection, used only with normal size SD Card
GenIO 02	MMCFBClk	<	0-1.8 V / 0-3.6V		Clock Feedback

Charger connector and charging interface connections & electrical characteristics

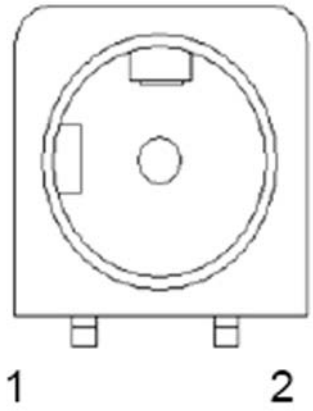

Figure 64 Charger connector

Table 16 Charging interface connections

Pin	Signal	I/O	Engine connection		Notes
1	Vchar	In	N2300	VCharIn1, 2	Charging voltage / charger detection, Center pin
2	Charge GND		Ground		Charger ground

Table 17 Charging IF electrical characteristics

Description	Parameter	Min	Max	Unit	Notes
Vchar	V Charge	0	9	V	Center pin
Vchar	I Charge		0.85	A	Center pin
Charge GND			0.85	A	

Copyright © 2006 Nokia. All rights reserved.

Description	Parameter	Min	Max	Unit	Notes
Threshold for charging, rising (N2300)	V_{MSTR+}	2.1		V	Typical value
Threshold for charging, falling (N2300)	V_{MSTR-}	1.9		V	Typical value

Battery interface electrical characteristics

Table 18 Battery IF electrical characteristics

Description	Parameter	Max	Unit
Operation voltage	V_{IN}	4.23	VDC
Current rating	I_{IN}	0.9	A

Internal interfaces

Name of Connection	Connector reference
Joystick connector	X4500
Display	X4400
ALS	V4400
Vibra	M2100
Microphone	B2100
Earpiece	B2101
IHF speaker	B2102

I2C

I2C is an Inter IC bus and aimed for slow control of peripherals.

The device uses I2C to interconnect QWERTY keyboard controller to RAP.

Keyboard interface electrical characteristics

Description	Parameter	Min	Typ	Max	Unit	Notes
High-level input voltage	V_{IH}	0.65* V_{DDS}	V_{DDS}	0.3+ V_{DDS}	V	Row
Low-level input voltage	V_{IL}	-0.3	0	0.35* V_{DDS}	V	Row
High-level output voltage	V_{OH}	1.62	V_{DDS}	1.98	V	Column
Low-level output voltage	V_{OL}		0	0.45	V	Column

Copyright © 2006 Nokia. All rights reserved.

Description	Parameter	Min	Typ	Max	Unit	Notes
(VDDS = 1.8V)						

Display connector and interface connections

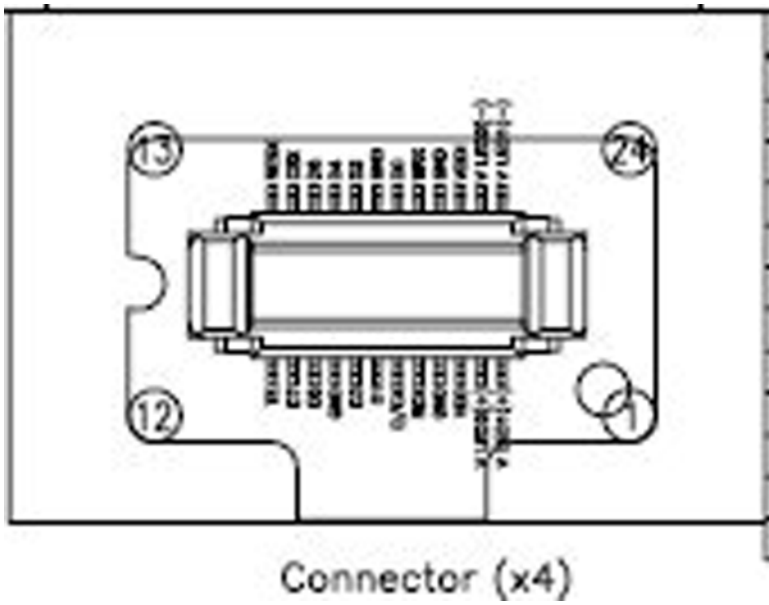

Connector (x4)

PIN#	Symbol	Symbol	PIN#
12	TE	RESX	13
11	D7	CSX	14
10	D5	D6	15
9	GND	D4	16
8	D3	D2	17
7	D1	GND	18
6	D/CX	D0	19
5	RDX	WRX	20
4	GND	GND	21
3	VDD	VDDI	22
2	V LED2(+)	V LED2(−)	23
1	V LED1(+)	V LED1(−)	24

Pin	Signal	I/O	Engine connection		Notes
1	V LED1 +	<-	N2301	VLEDout	N2301 is controlled by EM ASIC (N2300)
2	V LED2 +	<-	N2301	VLEDout	N2301 is controlled by EM ASIC (N2300)
3	VDD	<-	EM ASIC (N2200)	VAUX	Core Voltage
4	GND				
5	RDX	<-	RAP	Lcdrdx	Read Enable (active low)
6	D/CX	<-	RAP	Lcdrmd	Data/ Command select (high = data low = command)
7	D1	<->	RAP	Lcdda1	Data
8	D3	<->	RAP	Lcdda3	Data
9	GND				

Copyright © 2006 Nokia. All rights reserved.

Pin	Signal	I/O	Engine connection		Notes
10	D5	<->	RAP	Lcdda5	Data
11	D7	<->	RAP	Lcdda7	Data
12	TE	->	RAP	Te	Tearing Effect
13	RESX	<-	RAP	Gpio60	Reset (active low)
14	CSX	<-	RAP	Lcdsx	Chip Select (active low)
15	D6	<->	RAP	Lcdda6	Data
16	D4	<->	RAP	Lcdda4	Data
17	D2	<->	RAP	Lcdda2	Data
18	GND				
19	D0	<->	RAP	Lcdda0	Data
20	WRX	->	RAP	Lcdwrx	Write Enable (active low)
21	GND				
22	VDDI	<-	EM ASIC (N2200)	VIO	Interface voltage
23	V LED2 -	->	R2303	SETCURR1	Resistor
24	V LED1 -	->	R2303	SETCURR1	Resistor

Back-up battery interface electrical characteristics

Table 19 Back-up battery connections

Pin name	I/O	Connection	Notes
L2207, VBack	->	N2200, VBack	Back-up battery G2200 is connected to N2200 via coil

Table 20 Back-up battery electrical characteristics

Description	Parameter	Min	Typ	Max	Unit
Back-Up Battery Voltage	Vback	0	2.5	2.7	V

Copyright © 2006 Nokia. All rights reserved.

Frequency mappings

GSM850 frequencies

CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX
128	824.2	869.2	3296.8	3476.8	170	832.6	877.6	3330.4	3510.4	212	841.0	886.0	3364.0	3544.0
129	824.4	869.4	3297.6	3477.6	171	832.8	877.8	3331.2	3511.2	213	841.2	886.2	3364.8	3544.8
130	824.6	869.6	3298.4	3478.4	172	833.0	878.0	3332.0	3512.0	214	841.4	886.4	3365.6	3545.6
131	824.8	869.8	3299.2	3479.2	173	833.2	878.2	3332.8	3512.8	215	841.6	886.6	3366.4	3546.4
132	825.0	870.0	3300.0	3480.0	174	833.4	878.4	3333.6	3513.6	216	841.8	886.8	3367.2	3547.2
133	825.2	870.2	3300.8	3480.8	175	833.6	878.6	3334.4	3514.4	217	842.0	887.0	3368.0	3548.0
134	825.4	870.4	3301.6	3481.6	176	833.8	878.8	3335.2	3515.2	218	842.2	887.2	3368.8	3548.8
135	825.6	870.6	3302.4	3482.4	177	834.0	879.0	3336.0	3516.0	219	842.4	887.4	3369.6	3549.6
136	825.8	870.8	3303.2	3483.2	178	834.2	879.2	3336.8	3516.8	220	842.6	887.6	3370.4	3550.4
137	826.0	871.0	3304.0	3484.0	179	834.4	879.4	3337.6	3517.6	221	842.8	887.8	3371.2	3551.2
138	826.2	871.2	3304.8	3484.8	180	834.6	879.6	3338.4	3518.4	222	843.0	888.0	3372.0	3552.0
139	826.4	871.4	3305.6	3485.6	181	834.8	879.8	3339.2	3519.2	223	843.2	888.2	3372.8	3552.8
140	826.6	871.6	3306.4	3486.4	182	835.0	880.0	3340.0	3520.0	224	843.4	888.4	3373.6	3553.6
141	826.8	871.8	3307.2	3487.2	183	835.2	880.2	3340.8	3520.8	225	843.6	888.6	3374.4	3554.4
142	827.0	872.0	3308.0	3488.0	184	835.4	880.4	3341.6	3521.6	226	843.8	888.8	3375.2	3555.2
143	827.2	872.2	3308.8	3488.8	185	835.6	880.6	3342.4	3522.4	227	844.0	889.0	3376.0	3556.0
144	827.4	872.4	3309.6	3489.6	186	835.8	880.8	3343.2	3523.2	228	844.2	889.2	3376.8	3556.8
145	827.6	872.6	3310.4	3490.4	187	836.0	881.0	3344.0	3524.0	229	844.4	889.4	3377.6	3557.6
146	827.8	872.8	3311.2	3491.2	188	836.2	881.2	3344.8	3524.8	230	844.6	889.6	3378.4	3558.4
147	828.0	873.0	3312.0	3492.0	189	836.4	881.4	3345.6	3525.6	231	844.8	889.8	3379.2	3559.2
148	828.2	873.2	3312.8	3492.8	190	836.6	881.6	3346.4	3526.4	232	845.0	890.0	3380.0	3560.0
149	828.4	873.4	3313.6	3493.6	191	836.8	881.8	3347.2	3527.2	233	845.2	890.2	3380.8	3560.8
150	828.6	873.6	3314.4	3494.4	192	837.0	882.0	3348.0	3528.0	234	845.4	890.4	3381.6	3561.6
151	828.8	873.8	3315.2	3495.2	193	837.2	882.2	3348.8	3528.8	235	845.6	890.6	3382.4	3562.4
152	829.0	874.0	3316.0	3496.0	194	837.4	882.4	3349.6	3529.6	236	845.8	890.8	3383.2	3563.2
153	829.2	874.2	3316.8	3496.8	195	837.6	882.6	3350.4	3530.4	237	846.0	891.0	3384.0	3564.0
154	829.4	874.4	3317.6	3497.6	196	837.8	882.8	3351.2	3531.2	238	846.2	891.2	3384.8	3564.8
155	829.6	874.6	3318.4	3498.4	197	838.0	883.0	3352.0	3532.0	239	846.4	891.4	3385.6	3565.6
156	829.8	874.8	3319.2	3499.2	198	838.2	883.2	3352.8	3532.8	240	846.6	891.6	3386.4	3566.4
157	830.0	875.0	3320.0	3500.0	199	838.4	883.4	3353.6	3533.6	241	846.8	891.8	3387.2	3567.2
158	830.2	875.2	3320.8	3500.8	200	838.6	883.6	3354.4	3534.4	242	847.0	892.0	3388.0	3568.0
159	830.4	875.4	3321.6	3501.6	201	838.8	883.8	3355.2	3535.2	243	847.2	892.2	3388.8	3568.8
160	830.6	875.6	3322.4	3502.4	202	839.0	884.0	3356.0	3536.0	244	847.4	892.4	3389.6	3569.6
161	830.8	875.8	3323.2	3503.2	203	839.2	884.2	3356.8	3536.8	245	847.6	892.6	3390.4	3570.4
162	831.0	876.0	3324.0	3504.0	204	839.4	884.4	3357.6	3537.6	246	847.8	892.8	3391.2	3571.2
163	831.2	876.2	3324.8	3504.8	205	839.6	884.6	3358.4	3538.4	247	848.0	893.0	3392.0	3572.0
164	831.4	876.4	3325.6	3505.6	206	839.8	884.8	3359.2	3539.2	248	848.2	893.2	3392.8	3572.8
165	831.6	876.6	3326.4	3506.4	207	840.0	885.0	3360.0	3540.0	249	848.4	893.4	3393.6	3573.6
166	831.8	876.8	3327.2	3507.2	208	840.2	885.2	3360.8	3540.8	250	848.6	893.6	3394.4	3574.4
167	832.0	877.0	3328.0	3508.0	209	840.4	885.4	3361.6	3541.6	251	848.8	893.8	3395.2	3575.2

Copyright © 2006 Nokia. All rights reserved.

EGSM900 frequencies

CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX
975	880,2	925,2	3520,8	3700,8	1	890,2	935,2	3560,8	3740,8	63	902,6	947,6	3610,4	3790,4
976	880,4	925,4	3521,6	3701,6	2	890,4	935,4	3561,6	3741,6	64	902,8	947,8	3611,2	3791,2
977	880,6	925,6	3522,4	3702,4	3	890,6	935,6	3562,4	3742,4	65	903,0	948,0	3612,0	3792,0
978	880,8	925,8	3523,2	3703,2	4	890,8	935,8	3563,2	3743,2	66	903,2	948,2	3612,8	3792,8
979	881,0	926,0	3524,0	3704,0	5	891,0	936,0	3564,0	3744,0	67	903,4	948,4	3613,6	3793,6
980	881,2	926,2	3524,8	3704,8	6	891,2	936,2	3564,8	3744,8	68	903,6	948,6	3614,4	3794,4
981	881,4	926,4	3525,6	3705,6	7	891,4	936,4	3565,6	3745,6	69	903,8	948,8	3615,2	3795,2
982	881,6	926,6	3526,4	3706,4	8	891,6	936,6	3566,4	3746,4	70	904,0	949,0	3616,0	3796,0
983	881,8	926,8	3527,2	3707,2	9	891,8	936,8	3567,2	3747,2	71	904,2	949,2	3616,8	3796,8
984	882,0	927,0	3528,0	3708,0	10	892,0	937,0	3568,0	3748,0	72	904,4	949,4	3617,6	3797,6
985	882,2	927,2	3528,8	3708,8	11	892,2	937,2	3568,8	3748,8	73	904,6	949,6	3618,4	3798,4
986	882,4	927,4	3529,6	3709,6	12	892,4	937,4	3569,6	3749,6	74	904,8	949,8	3619,2	3799,2
987	882,6	927,6	3530,4	3710,4	13	892,6	937,6	3570,4	3750,4	75	905,0	950,0	3620,0	3800,0
988	882,8	927,8	3531,2	3711,2	14	892,8	937,8	3571,2	3751,2	76	905,2	950,2	3620,8	3800,8
989	883,0	928,0	3532,0	3712,0	15	893,0	938,0	3572,0	3752,0	77	905,4	950,4	3621,6	3801,6
990	883,2	928,2	3532,8	3712,8	16	893,2	938,2	3572,8	3752,8	78	905,6	950,6	3622,4	3802,4
991	883,4	928,4	3533,6	3713,6	17	893,4	938,4	3573,6	3753,6	79	905,8	950,8	3623,2	3803,2
992	883,6	928,6	3534,4	3714,4	18	893,6	938,6	3574,4	3754,4	80	906,0	951,0	3624,0	3804,0
993	883,8	928,8	3535,2	3715,2	19	893,8	938,8	3575,2	3755,2	81	906,2	951,2	3624,8	3804,8
994	884,0	929,0	3536,0	3716,0	20	894,0	939,0	3576,0	3756,0	82	906,4	951,4	3625,6	3805,6
995	884,2	929,2	3536,8	3716,8	21	894,2	939,2	3576,8	3756,8	83	906,6	951,6	3626,4	3806,4
996	884,4	929,4	3537,6	3717,6	22	894,4	939,4	3577,6	3757,6	84	906,8	951,8	3627,2	3807,2
997	884,6	929,6	3538,4	3718,4	23	894,6	939,6	3578,4	3758,4	85	907,0	952,0	3628,0	3808,0
998	884,8	929,8	3539,2	3719,2	24	894,8	939,8	3579,2	3759,2	86	907,2	952,2	3628,8	3808,8
999	885,0	930,0	3540,0	3720,0	25	895,0	940,0	3580,0	3760,0	87	907,4	952,4	3629,6	3809,6
1000	885,2	930,2	3540,8	3720,8	26	895,2	940,2	3580,8	3760,8	88	907,6	952,6	3630,4	3810,4
1001	885,4	930,4	3541,6	3721,6	27	895,4	940,4	3581,6	3761,6	89	907,8	952,8	3631,2	3811,2
1002	885,6	930,6	3542,4	3722,4	28	895,6	940,6	3582,4	3762,4	90	908,0	953,0	3632,0	3812,0
1003	885,8	930,8	3543,2	3723,2	29	895,8	940,8	3583,2	3763,2	91	908,2	953,2	3632,8	3812,8
1004	886,0	931,0	3544,0	3724,0	30	896,0	941,0	3584,0	3764,0	92	908,4	953,4	3633,6	3813,6
1005	886,2	931,2	3544,8	3724,8	31	896,2	941,2	3584,8	3764,8	93	908,6	953,6	3634,4	3814,4
1006	886,4	931,4	3545,6	3725,6	32	896,4	941,4	3585,6	3765,6	94	908,8	953,8	3635,2	3815,2
1007	886,6	931,6	3546,4	3726,4	33	896,6	941,6	3586,4	3766,4	95	909,0	954,0	3636,0	3816,0
1008	886,8	931,8	3547,2	3727,2	34	896,8	941,8	3587,2	3767,2	96	909,2	954,2	3636,8	3816,8
1009	887,0	932,0	3548,0	3728,0	35	897,0	942,0	3588,0	3768,0	97	909,4	954,4	3637,6	3817,6
1010	887,2	932,2	3548,8	3728,8	36	897,2	942,2	3588,8	3768,8	98	909,6	954,6	3638,4	3818,4
1011	887,4	932,4	3549,6	3729,6	37	897,4	942,4	3589,6	3769,6	99	909,8	954,8	3639,2	3819,2
1012	887,6	932,6	3550,4	3730,4	38	897,6	942,6	3590,4	3770,4	100	910,0	955,0	3640,0	3820,0
1013	887,8	932,8	3551,2	3731,2	39	897,8	942,8	3591,2	3771,2	101	910,2	955,2	3640,8	3820,8
1014	888,0	933,0	3552,0	3732,0	40	898,0	943,0	3592,0	3772,0	102	910,4	955,4	3641,6	3821,6
1015	888,2	933,2	3552,8	3732,8	41	898,2	943,2	3592,8	3772,8	103	910,6	955,6	3642,4	3822,4
1016	888,4	933,4	3553,6	3733,6	42	898,4	943,4	3593,6	3773,6	104	910,8	955,8	3643,2	3823,2
1017	888,6	933,6	3554,4	3734,4	43	898,6	943,6	3594,4	3774,4	105	911,0	956,0	3644,0	3824,0
1018	888,8	933,8	3555,2	3735,2	44	898,8	943,8	3595,2	3775,2	106	911,2	956,2	3644,8	3824,8
1019	889,0	934,0	3556,0	3736,0	45	899,0	944,0	3596,0	3776,0	107	911,4	956,4	3645,6	3825,6
1020	889,2	934,2	3556,8	3736,8	46	899,2	944,2	3596,8	3776,8	108	911,6	956,6	3646,4	3826,4
1021	889,4	934,4	3557,6	3737,6	47	899,4	944,4	3597,6	3777,6	109	911,8	956,8	3647,2	3827,2
1022	889,6	934,6	3558,4	3738,4	48	899,6	944,6	3598,4	3778,4	110	912,0	957,0	3648,0	3828,0
1023	889,8	934,8	3559,2	3739,2	49	899,8	944,8	3599,2	3779,2	111	912,2	957,2	3648,8	3828,8
0	890,0	935,0	3560,0	3740,0	50	900,0	945,0	3600,0	3780,0	112	912,4	957,4	3649,6	3829,6
					51	900,2	945,2	3600,8	3780,8	113	912,6	957,6	3650,4	3830,4
					52	900,4	945,4	3601,6	3781,6	114	912,8	957,8	3651,2	3831,2
					53	900,6	945,6	3602,4	3782,4	115	913,0	958,0	3652,0	3832,0
					54	900,8	945,8	3603,2	3783,2	116	913,2	958,2	3652,8	3832,8
					55	901,0	946,0	3604,0	3784,0	117	913,4	958,4	3653,6	3833,6
					56	901,2	946,2	3604,8	3784,8	118	913,6	958,6	3654,4	3834,4
					57	901,4	946,4	3605,6	3785,6	119	913,8	958,8	3655,2	3835,2
					58	901,6	946,6	3606,4	3786,4	120	914,0	959,0	3656,0	3836,0
					59	901,8	946,8	3607,2	3787,2	121	914,2	959,2	3656,8	3836,8
					60	902,0	947,0	3608,0	3788,0	122	914,4	959,4	3657,6	3837,6
					61	902,2	947,2	3608,8	3788,8	123	914,6	959,6	3658,4	3838,4
					62	902,4	947,4	3609,6	3789,6	124	914,8	959,8	3659,2	3839,2

Copyright © 2006 Nokia. All rights reserved.

GSM1800 frequencies

Ch	Tx	Rx	VCO Tx	VCO Rx	Ch	Tx	Rx	VCO Tx	VCO Rx	Ch	Tx	Rx	VCO Tx	VCO Rx	Ch	Tx	Rx	VCO Tx	VCO Rx
512	1710.2	1805.2	3420.4	3610.4	606	1729.0	1824.0	3458.0	3648.0	700	1747.8	1842.8	3495.6	3685.6	793	1766.4	1861.4	3532.8	3722.8
513	1710.4	1805.4	3420.8	3610.8	607	1729.2	1824.2	3458.4	3648.4	701	1748.0	1843.0	3496.0	3686.0	794	1766.6	1861.6	3533.2	3723.2
514	1710.6	1805.6	3421.2	3611.2	608	1729.4	1824.4	3458.8	3648.8	702	1748.2	1843.2	3496.4	3686.4	795	1766.8	1861.8	3533.6	3723.6
515	1710.8	1805.8	3421.6	3611.6	609	1729.6	1824.6	3459.2	3649.2	703	1748.4	1843.4	3496.8	3686.8	796	1767.0	1862.0	3534.0	3724.0
516	1711.0	1806.0	3422.0	3612.0	610	1729.8	1824.8	3459.6	3649.6	704	1748.6	1843.6	3497.2	3687.2	797	1767.2	1862.2	3534.4	3724.4
517	1711.2	1806.2	3422.4	3612.4	611	1730.0	1825.0	3460.0	3650.0	705	1748.8	1843.8	3497.6	3687.6	798	1767.4	1862.4	3534.8	3724.8
518	1711.4	1806.4	3422.8	3612.8	612	1730.2	1825.2	3460.4	3650.4	706	1749.0	1844.0	3498.0	3688.0	799	1767.6	1862.6	3535.2	3725.2
519	1711.6	1806.6	3423.2	3613.2	613	1730.4	1825.4	3460.8	3650.8	707	1749.2	1844.2	3498.4	3688.4	800	1767.8	1862.8	3535.6	3725.6
520	1711.8	1806.8	3423.6	3613.6	614	1730.6	1825.6	3461.2	3651.2	708	1749.4	1844.4	3498.8	3688.8	801	1768.0	1863.0	3536.0	3726.0
521	1712.0	1807.0	3424.0	3614.0	615	1730.8	1825.8	3461.6	3651.6	709	1749.6	1844.6	3499.2	3689.2	802	1768.2	1863.2	3536.4	3726.4
522	1712.2	1807.2	3424.4	3614.4	616	1731.0	1826.0	3462.0	3652.0	710	1749.8	1844.8	3499.6	3689.6	803	1768.4	1863.4	3536.8	3726.8
523	1712.4	1807.4	3424.8	3614.8	617	1731.2	1826.2	3462.4	3652.4	711	1750.0	1845.0	3500.0	3690.0	804	1768.6	1863.6	3537.2	3727.2
524	1712.6	1807.6	3425.2	3615.2	618	1731.4	1826.4	3462.8	3652.8	712	1750.2	1845.2	3500.4	3690.4	805	1768.8	1863.8	3537.6	3727.6
525	1712.8	1807.8	3425.6	3615.6	619	1731.6	1826.6	3463.2	3653.2	713	1750.4	1845.4	3500.8	3690.8	806	1769.0	1864.0	3538.0	3728.0
526	1713.0	1808.0	3426.0	3616.0	620	1731.8	1826.8	3463.6	3653.6	714	1750.6	1845.6	3501.2	3691.2	807	1769.2	1864.2	3538.4	3728.4
527	1713.2	1808.2	3426.4	3616.4	621	1732.0	1827.0	3464.0	3654.0	715	1750.8	1845.8	3501.6	3691.6	808	1769.4	1864.4	3538.8	3728.8
528	1713.4	1808.4	3426.8	3616.8	622	1732.2	1827.2	3464.4	3654.4	716	1751.0	1846.0	3502.0	3692.0	809	1769.6	1864.6	3539.2	3729.2
529	1713.6	1808.6	3427.2	3617.2	623	1732.4	1827.4	3464.8	3654.8	717	1751.2	1846.2	3502.4	3692.4	810	1769.8	1864.8	3539.6	3729.6
530	1713.8	1808.8	3427.6	3617.6	624	1732.6	1827.6	3465.2	3655.2	718	1751.4	1846.4	3502.8	3692.8	811	1770.0	1865.0	3540.0	3730.0
531	1714.0	1809.0	3428.0	3618.0	625	1732.8	1827.8	3465.6	3655.6	719	1751.6	1846.6	3503.2	3693.2	812	1770.2	1865.2	3540.4	3730.4
532	1714.2	1809.2	3428.4	3618.4	626	1733.0	1828.0	3466.0	3656.0	720	1751.8	1846.8	3503.6	3693.6	813	1770.4	1865.4	3540.8	3730.8
533	1714.4	1809.4	3428.8	3618.8	627	1733.2	1828.2	3466.4	3656.4	721	1752.0	1847.0	3504.0	3694.0	814	1770.6	1865.6	3541.2	3731.2
534	1714.6	1809.6	3429.2	3619.2	628	1733.4	1828.4	3466.8	3656.8	722	1752.2	1847.2	3504.4	3694.4	815	1770.8	1865.8	3541.6	3731.6
535	1714.8	1809.8	3429.6	3619.6	629	1733.6	1828.6	3467.2	3657.2	723	1752.4	1847.4	3504.8	3694.8	816	1771.0	1866.0	3542.0	3732.0
536	1715.0	1810.0	3430.0	3620.0	630	1733.8	1828.8	3467.6	3657.6	724	1752.6	1847.6	3505.2	3695.2	817	1771.2	1866.2	3542.4	3732.4
537	1715.2	1810.2	3430.4	3620.4	631	1734.0	1829.0	3468.0	3658.0	725	1752.8	1847.8	3505.6	3695.6	818	1771.4	1866.4	3542.8	3732.8
538	1715.4	1810.4	3430.8	3620.8	632	1734.2	1829.2	3468.4	3658.4	726	1753.0	1848.0	3506.0	3696.0	819	1771.6	1866.6	3543.2	3733.2
539	1715.6	1810.6	3431.2	3621.2	633	1734.4	1829.4	3468.8	3658.8	727	1753.2	1848.2	3506.4	3696.4	820	1771.8	1866.8	3543.6	3733.6
540	1715.8	1810.8	3431.6	3621.6	634	1734.6	1829.6	3469.2	3659.2	728	1753.4	1848.4	3506.8	3696.8	821	1772.0	1867.0	3544.0	3734.0
541	1716.0	1811.0	3432.0	3622.0	635	1734.8	1829.8	3469.6	3659.6	729	1753.6	1848.6	3507.2	3697.2	822	1772.2	1867.2	3544.4	3734.4
542	1716.2	1811.2	3432.4	3622.4	636	1735.0	1830.0	3470.0	3660.0	730	1753.8	1848.8	3507.6	3697.6	823	1772.4	1867.4	3544.8	3734.8
543	1716.4	1811.4	3432.8	3622.8	637	1735.2	1830.2	3470.4	3660.4	731	1754.0	1849.0	3508.0	3698.0	824	1772.6	1867.6	3545.2	3735.2
544	1716.6	1811.6	3433.2	3623.2	638	1735.4	1830.4	3470.8	3660.8	732	1754.2	1849.2	3508.4	3698.4	825	1772.8	1867.8	3545.6	3735.6
545	1716.8	1811.8	3433.6	3623.6	639	1735.6	1830.6	3471.2	3661.2	733	1754.4	1849.4	3508.8	3698.8	826	1773.0	1868.0	3546.0	3736.0
546	1717.0	1812.0	3434.0	3624.0	640	1735.8	1830.8	3471.6	3661.6	734	1754.6	1849.6	3509.2	3699.2	827	1773.2	1868.2	3546.4	3736.4
547	1717.2	1812.2	3434.4	3624.4	641	1736.0	1831.0	3472.0	3662.0	735	1754.8	1849.8	3509.6	3699.6	828	1773.4	1868.4	3546.8	3736.8
548	1717.4	1812.4	3434.8	3624.8	642	1736.2	1831.2	3472.4	3662.4	736	1755.0	1850.0	3510.0	3700.0	829	1773.6	1868.6	3547.2	3737.2
549	1717.6	1812.6	3435.2	3625.2	643	1736.4	1831.4	3472.8	3662.8	737	1755.2	1850.2	3510.4	3700.4	830	1773.8	1868.8	3547.6	3737.6
550	1717.8	1812.8	3435.6	3625.6	644	1736.6	1831.6	3473.2	3663.2	738	1755.4	1850.4	3510.8	3700.8	831	1774.0	1869.0	3548.0	3738.0
551	1718.0	1813.0	3436.0	3626.0	645	1736.8	1831.8	3473.6	3663.6	739	1755.6	1850.6	3511.2	3701.2	832	1774.2	1869.2	3548.4	3738.4
552	1718.2	1813.2	3436.4	3626.4	646	1737.0	1832.0	3474.0	3664.0	740	1755.8	1850.8	3511.6	3701.6	833	1774.4	1869.4	3548.8	3738.8
553	1718.4	1813.4	3436.8	3626.8	647	1737.2	1832.2	3474.4	3664.4	741	1756.0	1851.0	3512.0	3702.0	834	1774.6	1869.6	3549.2	3739.2
554	1718.6	1813.6	3437.2	3627.2	648	1737.4	1832.4	3474.8	3664.8	742	1756.2	1851.2	3512.4	3702.4	835	1774.8	1869.8	3549.6	3739.6
555	1718.8	1813.8	3437.6	3627.6	649	1737.6	1832.6	3475.2	3665.2	743	1756.4	1851.4	3512.8	3702.8	836	1775.0	1870.0	3550.0	3740.0
556	1719.0	1814.0	3438.0	3628.0	650	1737.8	1832.8	3475.6	3665.6	744	1756.6	1851.6	3513.2	3703.2	837	1775.2	1870.2	3550.4	3740.4
557	1719.2	1814.2	3438.4	3628.4	651	1738.0	1833.0	3476.0	3666.0	745	1756.8	1851.8	3513.6	3703.6	838	1775.4	1870.4	3550.8	3740.8
558	1719.4	1814.4	3438.8	3628.8	652	1738.2	1833.2	3476.4	3666.4	746	1757.0	1852.0	3514.0	3704.0	839	1775.6	1870.6	3551.2	3741.2
559	1719.6	1814.6	3439.2	3629.2	653	1738.4	1833.4	3476.8	3666.8	747	1757.2	1852.2	3514.4	3704.4	840	1775.8	1870.8	3551.6	3741.6
560	1719.8	1814.8	3439.6	3629.6	654	1738.6	1833.6	3477.2	3667.2	748	1757.4	1852.4	3514.8	3704.8	841	1776.0	1871.0	3552.0	3742.0
561	1720.0	1815.0	3440.0	3630.0	655	1738.8	1833.8	3477.6	3667.6	749	1757.6	1852.6	3515.2	3705.2	842	1776.2	1871.2	3552.4	3742.4
562	1720.2	1815.2	3440.4	3630.4	656	1739.0	1834.0	3478.0	3668.0	750	1757.8	1852.8	3515.6	3705.6	843	1776.4	1871.4	3552.8	3742.8
563	1720.4	1815.4	3440.8	3630.8	657	1739.2	1834.2	3478.4	3668.4	751	1758.0	1853.0	3516.0	3706.0	844	1776.6	1871.6	3553.2	3743.2
564	1720.6	1815.6	3441.2	3631.2	658	1739.4	1834.4	3478.8	3668.8	752	1758.2	1853.2	3516.4	3706.4	845	1776.8	1871.8	3553.6	3743.6
565	1720.8	1815.8	3441.6	3631.6	659	1739.6	1834.6	3479.2	3669.2	753	1758.4	1853.4	3516.8	3706.8	846	1777.0	1872.0	3554.0	3744.0
566	1721.0	1816.0	3442.0	3632.0	660	1739.8	1834.8	3479.6	3669.6	754	1758.6	1853.6	3517.2	3707.2	847	1777.2	1872.2	3554.4	3744.4
567	1721.2	1816.2	3442.4	3632.4	661	1740.0	1835.0	3480.0	3670.0	755	1758.8	1853.8	3517.6	3707.6	848	1777.4	1872.4	3554.8	3744.8
568	1721.4	1816.4	3442.8	3632.8	662	1740.2	1835.2	3480.4	3670.4	756	1759.0	1854.0	3518.0	3708.0	849	1777.6	1872.6	3555.2	3745.2
569	1721.6	1816.6	3443.2	3633.2	663	1740.4	1835.4	3480.8	3670.8	757	1759.2	1854.2	3518.4	3708.4	850	1777.8	1872.8	3555.6	3745.6
570	1721.8	1816.8	3443.6	3633.6	664	1740.6	1835.6	3481.2	3671.2	758	1759.4	1854.4	3518.8	3708.8	851	1778.0	1873.0	3556.0	3746.0
571	1722.0	1817.0	3444.0	3634.0	665	1740.8	1835.8	3481.6	3671.6	759	1759.6	1854.6	3519.2	3709.2	852	1778.2	1873.2	3556.4	3746.4
572	1722.2	1817.2	3444.4	3634.4	666	1741.0	1836.0	3482.0	3672.0	760	1759.8	1854.8	3519.6	3709.6	853	1778.4	1873.4	3556.8	3746.8
573	1722.4	1817.4	3444.8	3634.8	667	1741.2	1836.2	3482.4	3672.4	761	1760.0	1855.0	3520.0	3710.0	854	1778.6	1873.6	3557.2	3747.2
574	1722.6	1817.6	3445.2	3635.2	668	1741.4	1836.4	3482.8	3672.8	762	1760.2	1855.2	3520.4	3710.4	855	1778.8	1873.8	3557.6	3747.6
575	1722.8	1817.8	3445.6	3635.6	669	1741.6	1836.6	3483.2	3673.2	763	1760.4	1855.4	3520.8	3710.8	856	1779.0	1874.0	3558.0	3748.0
576	1723.0	1818.0	3446.0	3636.0	670	1741.8	1836.8	3483.6	3673.6	764	1760.6	1855.6	3521.2	3711.2	857	1779.2	1874.2	3558.4	3748.4
577	1723.2	1818.2	3446.4	3636.4	671	1742.0	1837.0	3484.0	3674.0	765	1760.8	1855.8	3521.6	3711.6	858	1779.4	1874.4	3558.8	3748.8
578	1723.4	1818.4	3446.8	3636.8	672	1742.2	1837.2	3484.4	3674.4	766	1761.0	1856.0	3522.0	3712.0	859	1779.6	1874.6	3559.2	3749.2
579	1723.6	1818.6	3447.2	3637.2	673	1742.4	1837.4	3484.8	3674.8	767	1761.2	1856.2	3522.4	3712.4	860	1779.8	1874.8	3559.6	3749.6
580	1723.8	1818.8	3447.6	3637.6	674	1742.6	1837.6	3485.2	3675.2	768	1761.4	1856.4	3522.8	3712.8	861	1780.0	1875.0	3560.0	3750.0
581	1724.0	1819.0	3448.0	3638.0	675	1742.8	1837.8	3485.6	3675.6	769	1761.6	1856.6	3523.2	3713.2	862	1780.2	1875.2	3560.4	3750.4
582	1724.2	1819.2	3448.4	3638.4	676	1743.0	1838.0	3486.0	3676.0	770	1761.8	1856.8	3523.6	3713.6	863	1780.4	1875.4	3560.8	3750.8
583	1724.4	1819.4	3448.8	3638.8	677	1743.2	1838.2	3486.4	3676.4	771	1762.0	1857.0	3524.0	3714.0	864	1780.6	1875.6	3561.2	3751.2
584	1724.6	1819.6	3449.2	3639.2	678	1743.4	1838.4	3486.8	3676.8	772	1762.2	1857.2	3524.4	3714.4	865	1780.8	1875.8	3561.6	3751.6
585	1724.8	1819.8	3449.6	3639.6	679	1743.6	1838.6	3487.2	3677.2	773	1762.4	1857.4	3524.8	3714.8	866	1781.0	1876.0	3562.0	3752.0
586	1725.0	1820.0	3450.0	3640.0	680	1743.8	1838.8	3487.6	3677.6	774	1762.6	1857.6	3525.2	3715.2	867	1781.2	1876.2	3562.4	3752.4
587	1725.2	1820.2	3450.4	3640.4	681	1744.0	1839.0	3488.0	3678.0	775	1762.8	1857.8	3525.6	3715.6	868	1781.4	1876.4	3562.8	3752.8
588	1725.4	1820.4	3450.8	3640.8	682	1744.2	1839.2	3488.4	3678.4	776	1763.0	1858.0	3526.0	3716.0	869	1781.6	1876.6	3563.2	3753.2
589	1725.6	1820.6	3451.2	3641.2	683	1744.4	1839.4	3488.8	3678.8	777	1763.2	1858.2	3526.4	3716.4	870	1781.8	1876.8	3563.6	3753.6
590	1725.8	1820.8	3451.6	3641.6	684	1744.6	1839.6	3489.2	3679.2	778	1763.4	1858.4	3526.8	3716.8	871	1782.0	1877.0	3564.0	3754.0
591	1726.0	1821.0	3452.0	3642.0	685	1744.8	1839.8	3489.6	3679.6	779	1763.6	1858.6	3527.2	3717.2	872	1782.2	1877.2	3564.4	3754.4
592	1726.2	1821.2	3452.4	3642.4	686	1745.0	1840.0	3490.0	3680.0	780	1763.8	1858.8	3527.6	3717.6	873	1782.4	1877.4	3564.8	3754.8
593	1726.4	1821.4	3452.8	3642.8	687	1745.2	1840.2	3490.4	3680.4	781	1764.0	1859.0	3528.0	3718.0	874	1782.6	1877.6	3565.2	3755.2
594	1726.6	1821.6	3453.2	3643.2	688	1745.4	1840.4	3490.8	3680.8	782	1764.2	1859.2	3528.4	3718.4	875	1782.8	1877.8	3565.6	3755.6
595	1726.8	1821.8	3453.6	3643.6	689	1745.6	1840.6	3491.2	3681.2	783	1764.4	1859.4	3528.8	3718.8	876	1783.0	1878.0	3566.0	3756.0
596	1727.0	1822.0	3454.0	3644.0	690	1745.8	1840.8	3491.6	3681.6	784	1764.6	1859.6	3529.2	3719.2	877	1783.2	1878.2	3566.4	3756.4
597	1727.2	1822.2	3454.4	3644.4	691	1746.0	1841.0	3492.0	3682.0	785	1764.8	1859.8	3529.6	3719.6	878	1783.4	1878.4	3566.8	3756.8
598	1727.4	1822.4	3454.8	3644.8	692	1746.2	1841.2	3492.4	3682.4	786	1765.0	1860.0	3530.0	3720.0	879	1783.6	1878.6	3567.2	3757.2
599	1727.6	1822.6	3455.2	3645.2	693	1746.4	1841.4	3492.8	3682.8	787	1765.2	1860.2	3530.4	3720.4	880	1783.8	1878.8	3567.6	3757.6
600	1727.8	1822.8	3455.6	3645.6	694	1746.6	1841.6	3493.2	3683.2	788	1765.4	1860.4	3530.8	3720.8	881	1784.0	1879.0	3568.0	3758.0
601	1728.0	1823.0	3456.0	3646.0	695	1746.8	1841.8	3493.6	3683.6	789	1765.6	1860.6	3531.2	3721.2	882	1784.2	1879.2	3568.4	3758.4
602	1728.2	1823.2	3456.4	3646.4	696	1747.0	1842.0	3494.0	3684.0	790	1765.8	1860.8	3531.6	3721.6	883	1784.4	1879.4	3568.8	3758.8
603	1728.4	1823.4	3456.8	3646.8	697	1747.2	1842.2	3494.4	3684.4	791	1766.0	1861.0	3532.0	3722.0	884	1784.6	1879.6	3569.2	3759.2
604	1728.6	1823.6	3457.2	3647.2	698	1747.4	1842.4	3494.8	3684.8	792	1766.2	1861.2	3532.4	3722.4	885	1784.8	1879.8	3569.6	3759.6
605	1728.8	1823.8	3457.6	3647.6	699	1747.6	1842.6	3495.2	3685.2										

Copyright © 2006 Nokia. All rights reserved.

GSM1900 frequencies

CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX	CH	TX	RX	VCO TX	VCO RX
512	1850,2	1930,2	3700,4	3860,4	606	1869,0	1949,0	3738,0	3898,0	700	1887,8	1967,8	3775,6	3935,6	794	1906,6	1986,6	3813,2	3973,2
513	1850,4	1930,4	3700,8	3860,8	607	1869,2	1949,2	3738,4	3898,4	701	1888,0	1968,0	3776,0	3936,0	795	1906,8	1986,8	3813,6	3973,6
514	1850,6	1930,6	3701,2	3861,2	608	1869,4	1949,4	3738,8	3898,8	702	1888,2	1968,2	3776,4	3936,4	796	1907,0	1987,0	3814,0	3974,0
515	1850,8	1930,8	3701,6	3861,6	609	1869,6	1949,6	3739,2	3899,2	703	1888,4	1968,4	3776,8	3936,8	797	1907,2	1987,2	3814,4	3974,4
516	1851,0	1931,0	3702,0	3862,0	610	1869,8	1949,8	3739,6	3899,6	704	1888,6	1968,6	3777,2	3937,2	798	1907,4	1987,4	3814,8	3974,8
517	1851,2	1931,2	3702,4	3862,4	611	1870,0	1950,0	3740,0	3900,0	705	1888,8	1968,8	3777,6	3937,6	799	1907,6	1987,6	3815,2	3975,2
518	1851,4	1931,4	3702,8	3862,8	612	1870,2	1950,2	3740,4	3900,4	706	1889,0	1969,0	3778,0	3938,0	800	1907,8	1987,8	3815,6	3975,6
519	1851,6	1931,6	3703,2	3863,2	613	1870,4	1950,4	3740,8	3900,8	707	1889,2	1969,2	3778,4	3938,4	801	1908,0	1988,0	3816,0	3976,0
520	1851,8	1931,8	3703,6	3863,6	614	1870,6	1950,6	3741,2	3901,2	708	1889,4	1969,4	3778,8	3938,8	802	1908,2	1988,2	3816,4	3976,4
521	1852,0	1932,0	3704,0	3864,0	615	1870,8	1950,8	3741,6	3901,6	709	1889,6	1969,6	3779,2	3939,2	803	1908,4	1988,4	3816,8	3976,8
522	1852,2	1932,2	3704,4	3864,4	616	1871,0	1951,0	3742,0	3902,0	710	1889,8	1969,8	3779,6	3939,6	804	1908,6	1988,6	3817,2	3977,2
523	1852,4	1932,4	3704,8	3864,8	617	1871,2	1951,2	3742,4	3902,4	711	1890,0	1970,0	3780,0	3940,0	805	1908,8	1988,8	3817,6	3977,6
524	1852,6	1932,6	3705,2	3865,2	618	1871,4	1951,4	3742,8	3902,8	712	1890,2	1970,2	3780,4	3940,4	806	1909,0	1989,0	3818,0	3978,0
525	1852,8	1932,8	3705,6	3865,6	619	1871,6	1951,6	3743,2	3903,2	713	1890,4	1970,4	3780,8	3940,8	807	1909,2	1989,2	3818,4	3978,4
526	1853,0	1933,0	3706,0	3866,0	620	1871,8	1951,8	3743,6	3903,6	714	1890,6	1970,6	3781,2	3941,2	808	1909,4	1989,4	3818,8	3978,8
527	1853,2	1933,2	3706,4	3866,4	621	1872,0	1952,0	3744,0	3904,0	715	1890,8	1970,8	3781,6	3941,6	809	1909,6	1989,6	3819,2	3979,2
528	1853,4	1933,4	3706,8	3866,8	622	1872,2	1952,2	3744,4	3904,4	716	1891,0	1971,0	3782,0	3942,0	810	1909,8	1989,8	3819,6	3979,6
529	1853,6	1933,6	3707,2	3867,2	623	1872,4	1952,4	3744,8	3904,8	717	1891,2	1971,2	3782,4	3942,4					
530	1853,8	1933,8	3707,6	3867,6	624	1872,6	1952,6	3745,2	3905,2	718	1891,4	1971,4	3782,8	3942,8					
531	1854,0	1934,0	3708,0	3868,0	625	1872,8	1952,8	3745,6	3905,6	719	1891,6	1971,6	3783,2	3943,2					
532	1854,2	1934,2	3708,4	3868,4	626	1873,0	1953,0	3746,0	3906,0	720	1891,8	1971,8	3783,6	3943,6					
533	1854,4	1934,4	3708,8	3868,8	627	1873,2	1953,2	3746,4	3906,4	721	1892,0	1972,0	3784,0	3944,0					
534	1854,6	1934,6	3709,2	3869,2	628	1873,4	1953,4	3746,8	3906,8	722	1892,2	1972,2	3784,4	3944,4					
535	1854,8	1934,8	3709,6	3869,6	629	1873,6	1953,6	3747,2	3907,2	723	1892,4	1972,4	3784,8	3944,8					
536	1855,0	1935,0	3710,0	3870,0	630	1873,8	1953,8	3747,6	3907,6	724	1892,6	1972,6	3785,2	3945,2					
537	1855,2	1935,2	3710,4	3870,4	631	1874,0	1954,0	3748,0	3908,0	725	1892,8	1972,8	3785,6	3945,6					
538	1855,4	1935,4	3710,8	3870,8	632	1874,2	1954,2	3748,4	3908,4	726	1893,0	1973,0	3786,0	3946,0					
539	1855,6	1935,6	3711,2	3871,2	633	1874,4	1954,4	3748,8	3908,8	727	1893,2	1973,2	3786,4	3946,4					
540	1855,8	1935,8	3711,6	3871,6	634	1874,6	1954,6	3749,2	3909,2	728	1893,4	1973,4	3786,8	3946,8					
541	1856,0	1936,0	3712,0	3872,0	635	1874,8	1954,8	3749,6	3909,6	729	1893,6	1973,6	3787,2	3947,2					
542	1856,2	1936,2	3712,4	3872,4	636	1875,0	1955,0	3750,0	3910,0	730	1893,8	1973,8	3787,6	3947,6					
543	1856,4	1936,4	3712,8	3872,8	637	1875,2	1955,2	3750,4	3910,4	731	1894,0	1974,0	3788,0	3948,0					
544	1856,6	1936,6	3713,2	3873,2	638	1875,4	1955,4	3750,8	3910,8	732	1894,2	1974,2	3788,4	3948,4					
545	1856,8	1936,8	3713,6	3873,6	639	1875,6	1955,6	3751,2	3911,2	733	1894,4	1974,4	3788,8	3948,8					
546	1857,0	1937,0	3714,0	3874,0	640	1875,8	1955,8	3751,6	3911,6	734	1894,6	1974,6	3789,2	3949,2					
547	1857,2	1937,2	3714,4	3874,4	641	1876,0	1956,0	3752,0	3912,0	735	1894,8	1974,8	3789,6	3949,6					
548	1857,4	1937,4	3714,8	3874,8	642	1876,2	1956,2	3752,4	3912,4	736	1895,0	1975,0	3790,0	3950,0					
549	1857,6	1937,6	3715,2	3875,2	643	1876,4	1956,4	3752,8	3912,8	737	1895,2	1975,2	3790,4	3950,4					
550	1857,8	1937,8	3715,6	3875,6	644	1876,6	1956,6	3753,2	3913,2	738	1895,4	1975,4	3790,8	3950,8					
551	1858,0	1938,0	3716,0	3876,0	645	1876,8	1956,8	3753,6	3913,6	739	1895,6	1975,6	3791,2	3951,2					
552	1858,2	1938,2	3716,4	3876,4	646	1877,0	1957,0	3754,0	3914,0	740	1895,8	1975,8	3791,6	3951,6					
553	1858,4	1938,4	3716,8	3876,8	647	1877,2	1957,2	3754,4	3914,4	741	1896,0	1976,0	3792,0	3952,0					
554	1858,6	1938,6	3717,2	3877,2	648	1877,4	1957,4	3754,8	3914,8	742	1896,2	1976,2	3792,4	3952,4					
555	1858,8	1938,8	3717,6	3877,6	649	1877,6	1957,6	3755,2	3915,2	743	1896,4	1976,4	3792,8	3952,8					
556	1859,0	1939,0	3718,0	3878,0	650	1877,8	1957,8	3755,6	3915,6	744	1896,6	1976,6	3793,2	3953,2					
557	1859,2	1939,2	3718,4	3878,4	651	1878,0	1958,0	3756,0	3916,0	745	1896,8	1976,8	3793,6	3953,6					
558	1859,4	1939,4	3718,8	3878,8	652	1878,2	1958,2	3756,4	3916,4	746	1897,0	1977,0	3794,0	3954,0					
559	1859,6	1939,6	3719,2	3879,2	653	1878,4	1958,4	3756,8	3916,8	747	1897,2	1977,2	3794,4	3954,4					
560	1859,8	1939,8	3719,6	3879,6	654	1878,6	1958,6	3757,2	3917,2	748	1897,4	1977,4	3794,8	3954,8					
561	1860,0	1940,0	3720,0	3880,0	655	1878,8	1958,8	3757,6	3917,6	749	1897,6	1977,6	3795,2	3955,2					
562	1860,2	1940,2	3720,4	3880,4	656	1879,0	1959,0	3758,0	3918,0	750	1897,8	1977,8	3795,6	3955,6					
563	1860,4	1940,4	3720,8	3880,8	657	1879,2	1959,2	3758,4	3918,4	751	1898,0	1978,0	3796,0	3956,0					
564	1860,6	1940,6	3721,2	3881,2	658	1879,4	1959,4	3758,8	3918,8	752	1898,2	1978,2	3796,4	3956,4					
565	1860,8	1940,8	3721,6	3881,6	659	1879,6	1959,6	3759,2	3919,2	753	1898,4	1978,4	3796,8	3956,8					
566	1861,0	1941,0	3722,0	3882,0	660	1879,8	1959,8	3759,6	3919,6	754	1898,6	1978,6	3797,2	3957,2					
567	1861,2	1941,2	3722,4	3882,4	661	1880,0	1960,0	3760,0	3920,0	755	1898,8	1978,8	3797,6	3957,6					
568	1861,4	1941,4	3722,8	3882,8	662	1880,2	1960,2	3760,4	3920,4	756	1899,0	1979,0	3798,0	3958,0					
569	1861,6	1941,6	3723,2	3883,2	663	1880,4	1960,4	3760,8	3920,8	757	1899,2	1979,2	3798,4	3958,4					
570	1861,8	1941,8	3723,6	3883,6	664	1880,6	1960,6	3761,2	3921,2	758	1899,4	1979,4	3798,8	3958,8					
571	1862,0	1942,0	3724,0	3884,0	665	1880,8	1960,8	3761,6	3921,6	759	1899,6	1979,6	3799,2	3959,2					
572	1862,2	1942,2	3724,4	3884,4	666	1881,0	1961,0	3762,0	3922,0	760	1899,8	1979,8	3799,6	3959,6					
573	1862,4	1942,4	3724,8	3884,8	667	1881,2	1961,2	3762,4	3922,4	761	1900,0	1980,0	3800,0	3960,0					
574	1862,6	1942,6	3725,2	3885,2	668	1881,4	1961,4	3762,8	3922,8	762	1900,2	1980,2	3800,4	3960,4					
575	1862,8	1942,8	3725,6	3885,6	669	1881,6	1961,6	3763,2	3923,2	763	1900,4	1980,4	3800,8	3960,8					
576	1863,0	1943,0	3726,0	3886,0	670	1881,8	1961,8	3763,6	3923,6	764	1900,6	1980,6	3801,2	3961,2					
577	1863,2	1943,2	3726,4	3886,4	671	1882,0	1962,0	3764,0	3924,0	765	1900,8	1980,8	3801,6	3961,6					
578	1863,4	1943,4	3726,8	3886,8	672	1882,2	1962,2	3764,4	3924,4	766	1901,0	1981,0	3802,0	3962,0					
579	1863,6	1943,6	3727,2	3887,2	673	1882,4	1962,4	3764,8	3924,8	767	1901,2	1981,2	3802,4	3962,4					
580	1863,8	1943,8	3727,6	3887,6	674	1882,6	1962,6	3765,2	3925,2	768	1901,4	1981,4	3802,8	3962,8					
581	1864,0	1944,0	3728,0	3888,0	675	1882,8	1962,8	3765,6	3925,6	769	1901,6	1981,6	3803,2	3963,2					
582	1864,2	1944,2	3728,4	3888,4	676	1883,0	1963,0	3766,0	3926,0	770	1901,8	1981,8	3803,6	3963,6					
583	1864,4	1944,4	3728,8	3888,8	677	1883,2	1963,2	3766,4	3926,4	771	1902,0	1982,0	3804,0	3964,0					
584	1864,6	1944,6	3729,2	3889,2	678	1883,4	1963,4	3766,8	3926,8	772	1902,2	1982,2	3804,4	3964,4					
585	1864,8	1944,8	3729,6	3889,6	679	1883,6	1963,6	3767,2	3927,2	773	1902,4	1982,4	3804,8	3964,8					
586	1865,0	1945,0	3730,0	3890,0	680	1883,8	1963,8	3767,6	3927,6	774	1902,6	1982,6	3805,2	3965,2					
587	1865,2	1945,2	3730,4	3890,4	681	1884,0	1964,0	3768,0	3928,0	775	1902,8	1982,8	3805,6	3965,6					
588	1865,4	1945,4	3730,8	3890,8	682	1884,2	1964,2	3768,4	3928,4	776	1903,0	1983,0	3806,0	3966,0					
589	1865,6	1945,6	3731,2	3891,2	683	1884,4	1964,4	3768,8	3928,8	777	1903,2	1983,2	3806,4	3966,4					
590	1865,8	1945,8	3731,6	3891,6	684	1884,6	1964,6	3769,2	3929,2	778	1903,4	1983,4	3806,8	3966,8					
591	1866,0	1946,0	3732,0	3892,0	685	1884,8	1964,8	3769,6	3929,6	779	1903,6	1983,6	3807,2	3967,2					
592	1866,2	1946,2	3732,4	3892,4	686	1885,0	1965,0	3770,0	3930,0	780	1903,8	1983,8	3807,6	3967,6					
593	1866,4	1946,4	3732,8	3892,8	687	1885,2	1965,2	3770,4	3930,4	781	1904,0	1984,0	3808,0	3968,0					
594	1866,6	1946,6	3733,2	3893,2	688	1885,4	1965,4	3770,8	3930,8	782	1904,2	1984,2	3808,4	3968,4					
595	1866,8	1946,8	3733,6	3893,6	689	1885,6	1965,6	3771,2	3931,2	783	1904,4	1984,4	3808,8	3968,8					
596	1867,0	1947,0	3734,0	3894,0	690	1885,8	1965,8	3771,6	3931,6	784	1904,6	1984,6	3809,2	3969,2					
597	1867,2	1947,2	3734,4	3894,4	691	1886,0	1966,0	3772,0	3932,0	785	1904,8	1984,8	3809,6	3969,6					
598	1867,4	1947,4	3734,8	3894,8	692	1886,2	1966,2	3772,4	3932,4	786	1905,0	1985,0	3810,0	3970,0					
599	1867,6	1947,6	3735,2	3895,2	693	1886,4	1966,4	3772,8	3932,8	787	1905,2	1985,2	3810,4	3970,4					
600	1867,8	1947,8	3735,6	3895,6	694	1886,6	1966,6	3773,2	3933,2	788	1905,4	1985,4	3810,8	3970,8					
601	1868,0	1948,0	3736,0	3896,0	695	1886,8	1966,8	3773,6	3933,6	789	1905,6	1985,6	3811,2	3971,2					
602	1868,2	1948,2	3736,4	3896,4	696	1887,0	1967,0	3774,0	3934,0	790	1905,8	1985,8	3811,6	3971,6					
603	1868,4	1948,4	3736,8	3896,8	697	1887,2	1967,2	3774,4	3934,4	791	1906,0	1986,0	3812,0	3972,0					
604	1868,6	1948,6	3737,2	3897,2	698	1887,4	1967,4	3774,8	3934,8	792	1906,2	1986,2	3812,4	3972,4					
605	1868,8	1948,8	3737,6	3897,6	699	1887,6	1967,6	3775,2	3935,2	793	1906,4	1986,4	3812,8	3972,8					

Copyright © 2006 Nokia. All rights reserved.